



Torque Motors

Motors, Drives & Accessories

Torque Motors

Alongside complete rotary tables, HIWIN also offers individual torque motor components for the customised design of directly driven rotary axes. The torque motor components each consist of a hollow shaft rotor and a stator with coils.

Contents

1	Product overview	7
2	General information	8
2.1	Typical features of the torque motors	8
2.2	General structure of the torque motors	8
2.3	Typical application examples for torque motors	9
2.4	Glossary	10
3	HIWIN torque motors DMR	11
3.1	Special characteristics of the torque motors DMR	11
3.2	Order code for torque motors DMR	11
3.3	DMR torques	11
3.4	Torque motor DMR specifications	12
3.4.1	DMR0 specifications	12
3.4.2	DMR1 specifications	14
3.4.3	DMR3 specifications	16
3.4.4	DMR7 specifications	18
4	HIWIN torque motors TM-2	20
4.1	Special characteristics of the torque motors TM-2	20
4.2	Order code for torque motors TM-2	20
4.3	TM-2 torques	21
4.4	Torque motor TM-2 specifications	22
4.4.1	TM-2-1 specifications	22
4.4.2	TM-2-2 specifications	25
4.4.3	TM-2-4 specifications	28
4.4.4	TM-2-7 specifications	31
4.4.5	TM-2-A specifications	34
4.4.6	TM-2-D specifications	37
4.4.7	TM-2-G specifications	40
5	HIWIN torque motors IM-2	43
5.1	Special characteristics of the torque motors IM-2	43
5.2	Order code for torque motors IM-2	43
5.3	IM-2 torques	44
5.4	Torque motor IM-2 specifications	45
5.4.1	IM-2-2 specifications	45
5.4.2	IM-2-4 specifications	48
5.4.3	IM-2-7 specifications	51
5.4.4	IM-2-A specifications	54
5.4.5	IM-2-G specifications	58
6	Options and accessories	61
6.1	Closed cooling jacket	61
6.2	Cable outlet orientations of the torque motors	62

1. Product overview



HIWIN torque motors DMR

[Page 11](#)

- Torques up to 450 Nm
- Typical field of application: automation technology



HIWIN torque motors TM-2

[Page 20](#)

- New generation of TMRW series
- Torques up to 6,000 Nm
- Water cooling
- Typical field of application: machine tool



HIWIN torque motors IM-2

[Page 43](#)

- High speed motor with highest speed spectrum
- Torques up to 5,700 Nm
- Water cooling
- Typical field of application: machine tool, specially combined turning/milling axes



Options and accessories

[Page 61](#)

Torque Motors

General information

2. General information

2.1 Typical features of the torque motors

HIWIN torque motors are high-pole synchronous servomotors. Due to the high-pole structure, no downstream transmission is required for speed reduction and torque increase. HIWIN torque motors are typically used as direct drives in high-precision rotary and tilting axes.

The power transmission between the input and output sides is contactless. Mechanical components in the drivetrain, as they are present in classic engine/gearbox combinations, are not required.

The result is a wear- and maintenance-free drive with maximum efficiency. Due to the very rigid load coupling, HIWIN torque motors are predestined for highly dynamic applications with rapid load changes that push classic motor/gearbox combinations to their limits. In order to avoid introducing additional process heat, especially in the machine tool sector, the torque motors are equipped with cooling channels for liquid cooling.

- Wear-free and maintenance-free direct drive
- High constant torque independent of speed
- Highly dynamic and silent
- Play-free and highly precise
- Fast speed changes and maximum rigidity
- High efficiency
- Compact design with hollow shaft
- Made ready for liquid cooling



2.2 General structure of the torque motors

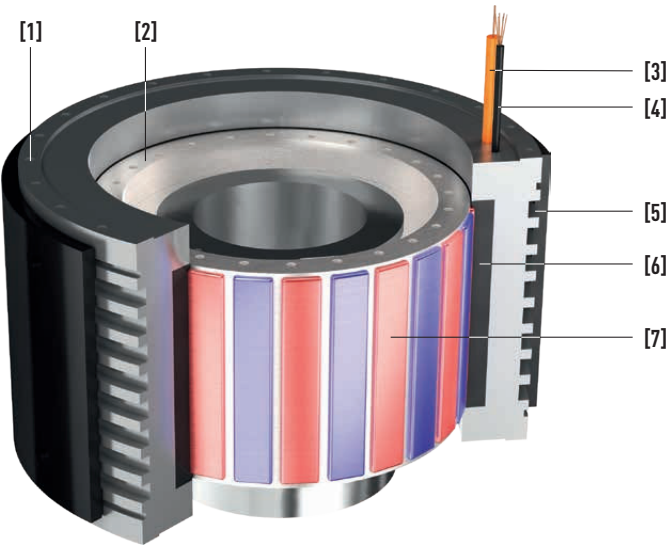





Table 2.1 Main components of the torque motors

Pos.	Component	Pos.	Component
1	Stator	5	Cooling channels for liquid cooling
2	Rotor with permanent magnets and hollow shaft	6	Winding package encapsulated in epoxy resin
3	Motor cable	7	Permanent magnets
4	Temperature sensor cable		

2.3 Typical application examples for torque motors

Table 2.2 Typical application examples for torque motors

Machine tools		Automation technology	
	Rotary and tilting axes (A, B, C axes)		Brake motors for roll-off drives
	Combined axes for turning and milling operations		Electronic rotary indexing tables
	Tool changer (turret)		Servo presses
	Infeed axes of pin chasing grinding machines (non-circular grinding)		Laser processing (B and C axes)

Torque Motors

General information

2.4 Glossary

Continuous current I_c / I_{c_wc} (A)

The continuous current or rated current I_c , or I_{c_wc} in the case of water cooling, is the current which in continuous operation heats the motor to the permissible motor temperature T_{max} at an ambient temperature of 25 °C.

Continuous torque T_c / T_{c_wc} (Nm)

The motor generates the continuous torque or rated torque in continuous operation (duty cycle = 100 %).

Stall current I_s / I_{s_wc} (A)

The stall current is the current that generates the maximum stall torque T_s or T_{s_wc} at a motor temperature of 25 °C.

Stall torque T_s / T_{s_wc} (Nm)

If the motor is operated with a frequency of 0 – 1 Hz, the motor torque must be reduced to the maximum stall torque T_s or T_{s_wc} in continuous operation.

Peak current I_p (A)


The peak current is applied briefly to generate the peak torque. The maximum permissible duration of the peak current is one second. The motor must then cool down to the nominal temperature before the peak current can be applied again.

Peak torque T_p (Nm)

The peak torque is the maximum torque that the motor can generate for about one second. For HIWIN products, it is at the end of the linear modulation range at the peak current I_p and is particularly important during acceleration and braking.

Torque-speed curve

The torque-speed curve describes the available torque T as a function of the speed n and the input voltage UDC.

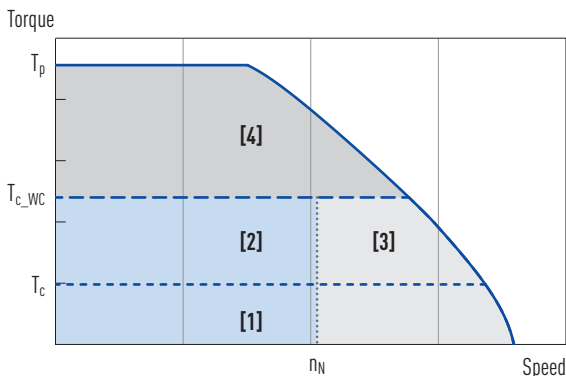

- Range [1]
Continuous operation without water cooling: When operating without water cooling, the motor can be operated continuously up to the maximum motor torque T_c and the maximum speed n_N .
- Ranges [1] + [2]
Continuous operation with water cooling: When operating with water cooling, the motor can be operated in continuous operation up to the maximum motor torque T_{c_wc} and the maximum speed n_N .
- Range [3]
Intermittent operation: When operating at a speed greater than n_N , the load cycle must be reduced to avoid thermal overload of the motor.
- Range [4]
Intermittent operation: When operating with a torque greater than T_c (without water cooling) or T_{c_wc} (with water cooling), the load cycle must be reduced to avoid thermal overload of the motor.

Back emf constant K_u ($V_{eff}/(rad/s)$)

The back EMF constant K_u is the ratio of the back EMF voltage (V_{eff}) to the motor speed (rad/s). The back EMF is an electromagnetic force generated by the movement of the coils in the magnetic field of the permanent magnets and acts contrary to the motor force.

Winding temperature T_{max} (°C)

Permissible winding temperature. The actual motor temperature depends on the installation conditions, the cooling conditions and the operating conditions and can therefore only be determined in the specific case and only inadequately calculated.

Winding resistance R_{25} (Ω)

Winding-specific parameter that specifies the winding resistance line to line at 25 °C winding temperature.

Winding inductance L_{25} (mH)

Winding-specific parameter indicating the inductance line to line at 25 °C winding temperature.

Motor constant K_m (Nm/VW)

Ratio of generated power to power loss, i. e. a measure of the efficiency of a motor.

Number of poles $2p$

The number of poles $2p$ indicates the number of single poles of the motor, P the number of pole pairs.

Thermal resistance R_{th} (°C/W)

Thermal resistance is defined as the resistance below which the motor winding dissipates heat to the environment. Considered is the natural convection at an ambient temperature of 25 °C, and for the water-cooled versions at a water temperature of 25 °C.

Torque constant K_t (Nm/A)

Winding-specific parameter from which the resulting torque at 25 °C motor temperature is calculated by multiplication with the input current.

$$T = I \times K_t$$

Maximum speed n_{max} (min^{-1})

The maximum speed is defined as the speed at which a specific torque is still achieved. 3 maximum speeds are specified, n_{max} at T_c , n_{max} at T_{c_wc} and n_{max} at T_p .

Rated speed n_N (min^{-1})

The rated speed is defined as the speed at which the rotor does not heat up above 80 °C in continuous operation. At higher speeds, either the duty cycle must be reduced or suitable measures must be taken for rotor cooling.

Maximum input voltage U_{max} (VDC)

Maximum DC bus voltage of the drive amplifier, or the resulting maximum input voltage at the motor.

3. HIWIN torque motors DMR

3.1 Special characteristics of the torque motors DMR

DMR series torque motors are ready-to-install motor elements consisting of a stator and rotor, especially suitable for the field of automation technology. The rotor is designed as a ring element. Due to their high continuous and peak torques, they enable high accelerations and thus short cycle times.

Key features of the torque motors DMR:


- Wear- and maintenance-free direct drive
- Play-free and highly precise
- UL-certified (DMR3, DMR7)

Typical fields of application for the torque motors DMR:


- Automation technology
- Rotary indexing tables



3.2 Order code for torque motors DMR

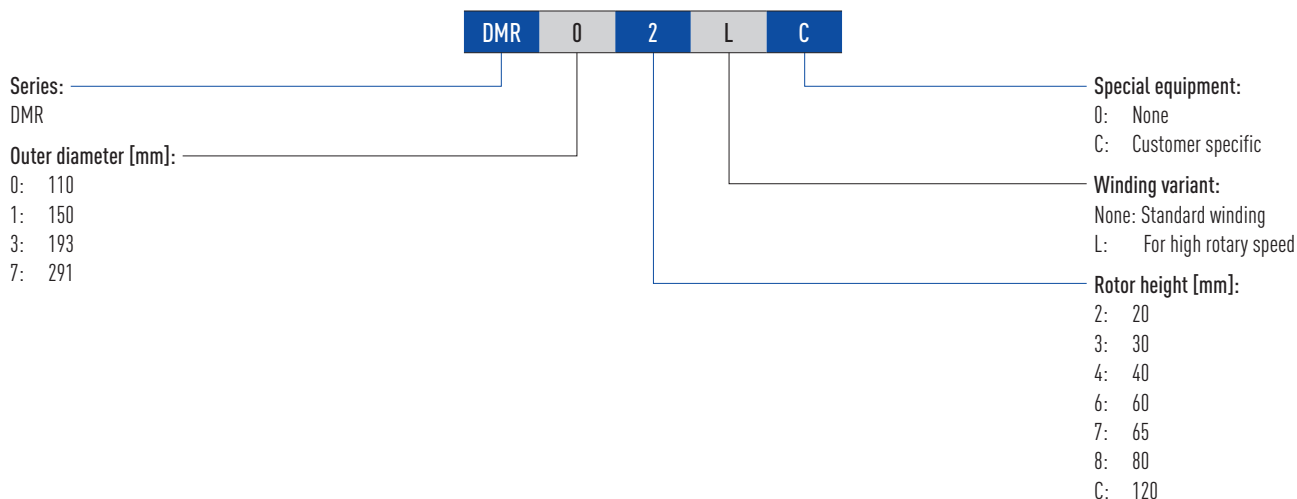

3.3 DMR torques

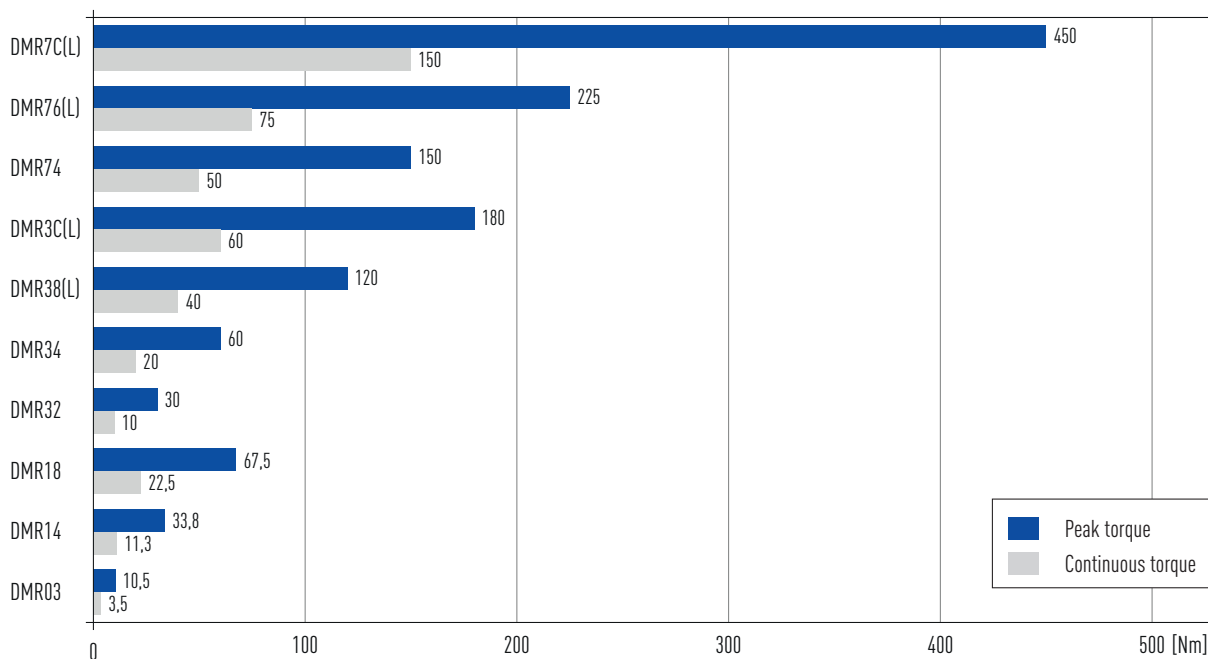

Torque Motors

HIWIN torque motors DMR

3.4 Torque motor DMR specifications

3.4.1 DMR0 specifications

Torque-speed curve (DC bus voltage: 600 VDC)



Table 3.1 Technical data for DMR0



	Symbol	Unit	DMR03
Torques and electrical parameters			
Peak torque (for 1 sec.)	T_p	Nm	10.5
Continuous torque ¹⁾	T_c	Nm	3.5
Stall torque	T_s	Nm	2.5
Peak current (for 1 sec.)	I_p	A	6.8
Continuous current ¹⁾	I_c	A	2.3
Stall current	I_s	A	1.6
Resistance ²⁾	R_{25}	Ω	7.1
Inductance ²⁾	L_{25}	mH	15.2
Motor constant	K_m	Nm/ $\sqrt{W}$	0.5
Electrical time constant	K_e	ms	2.1
Torque constant	K_t	Nm/A	1.55
Back emf constant	K_u	V _{eff} /rad/s	0.82
Inertia of rotor	J	kgm ²	0.00018
Thermal resistance	R_{th}	°C/W	1.76
Thermal time constant	T_{th}	s	1,930
Max. DC bus voltage	U_{max}	VDC	600
Rated speed	n_N	min ⁻¹	1,800
Mechanical parameters			
Number of poles	2p		10
Thermal sensor			PTC SNM 120
Stator height	H_S	mm	68.5
Rotor height	H_R	mm	32.5
Mass of motor	M_m	kg	2.6

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 °C ambient temperature

¹⁾ Coil temperature: 120 °C

²⁾ Line to line

Dimensions DMRO

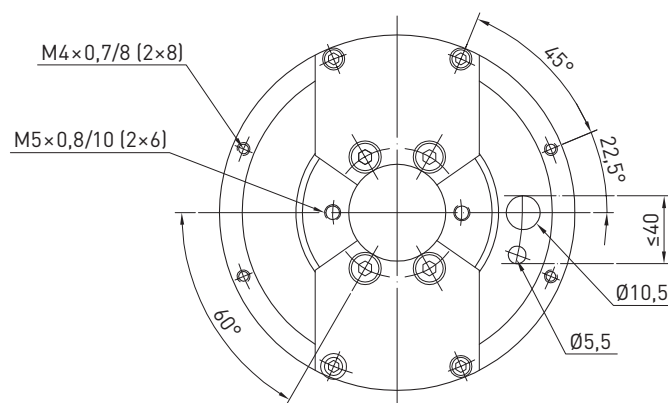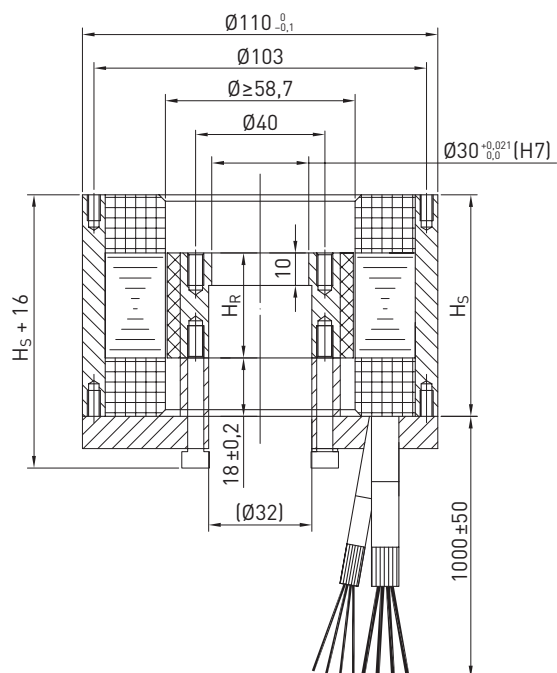

Torque Motors

HIWIN torque motors DMR

3.4.2 DMR1 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

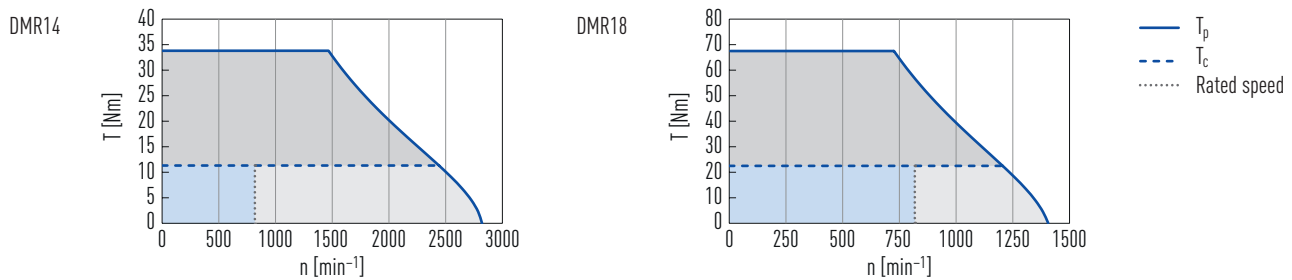


Table 3.2 Technical data for DMR1


	Symbol	Unit	DMR14	DMR18
Torques and electrical parameters				
Peak torque (for 1 sec.)	T_p	Nm	33.8	67.5
Continuous torque ¹⁾	T_c	Nm	11.3	22.5
Stall torque	T_s	Nm	7.9	15.8
Peak current (for 1 sec.)	I_p	A	13.5	13.5
Continuous current ¹⁾	I_c	A	4.5	4.5
Stall current	I_s	A	3.2	3.2
Resistance ²⁾	R_{25}	Ω	3.9	6.5
Inductance ²⁾	L_{25}	mH	14	26
Motor constant	K_m	Nm/ $\sqrt{W}$	1.0	1.6
Electrical time constant	K_e	ms	3.6	4.0
Torque constant	K_t	Nm/A	2.50	5.0
Back emf constant	K_u	$V_{eff}/(\text{rad/s})$	1.2	2.4
Inertia of rotor	J	kgm ²	0.00088	0.00175
Thermal resistance	R_{th}	°C/W	0.80	0.48
Thermal time constant	T_{th}	s	2,290	2,520
Max. DC bus voltage	U_{max}	VDC	600	
Rated speed	n_N	min ⁻¹	818	818
Mechanical parameters				
Number of poles	$2p$		22	
Thermal sensor			PTC SNM 120	
Stator height	H_S	mm	70	110
Rotor height	H_R	mm	40	80
Mass of motor	M_m	kg	4.8	8.3

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 °C ambient temperature

¹⁾ Coil temperature: 120 °C

²⁾ Line to line

Dimensions DMR1

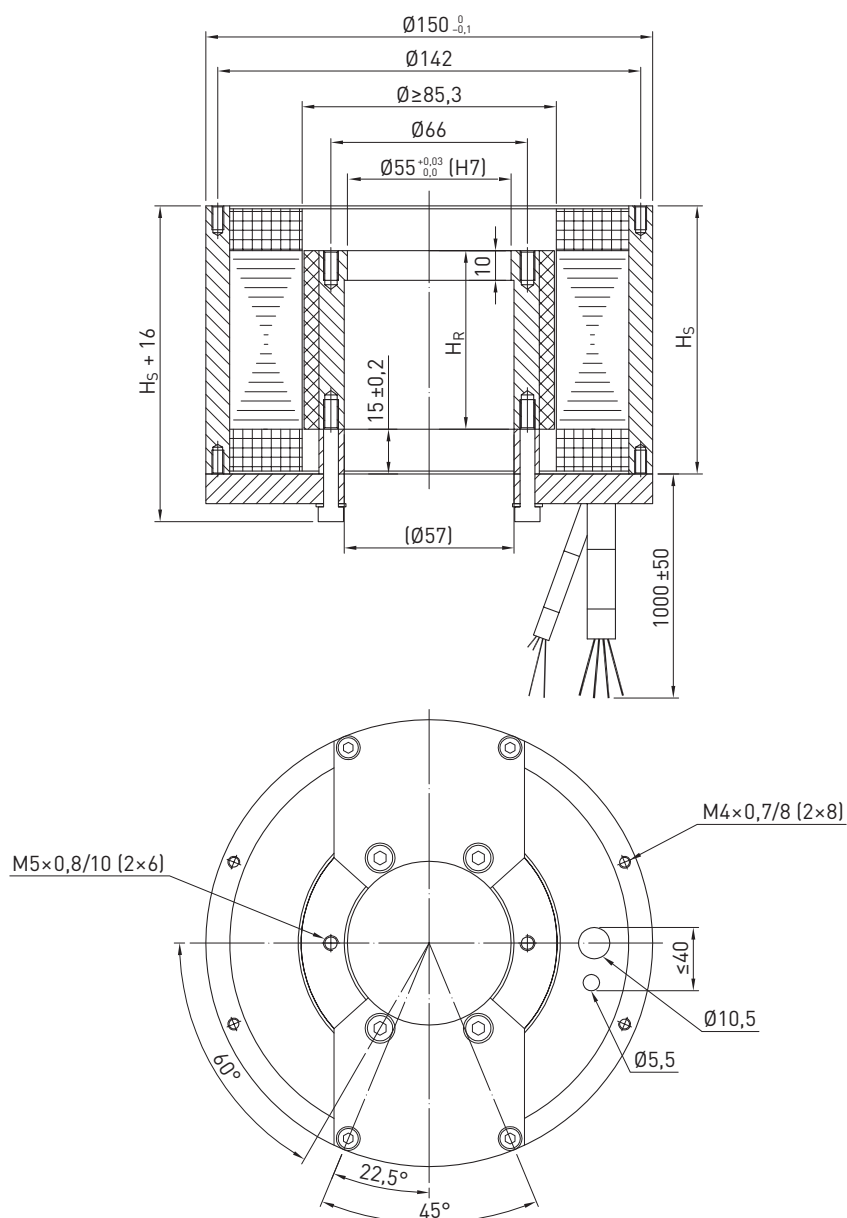

Torque Motors

HIWIN torque motors DMR

3.4.3 DMR3 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

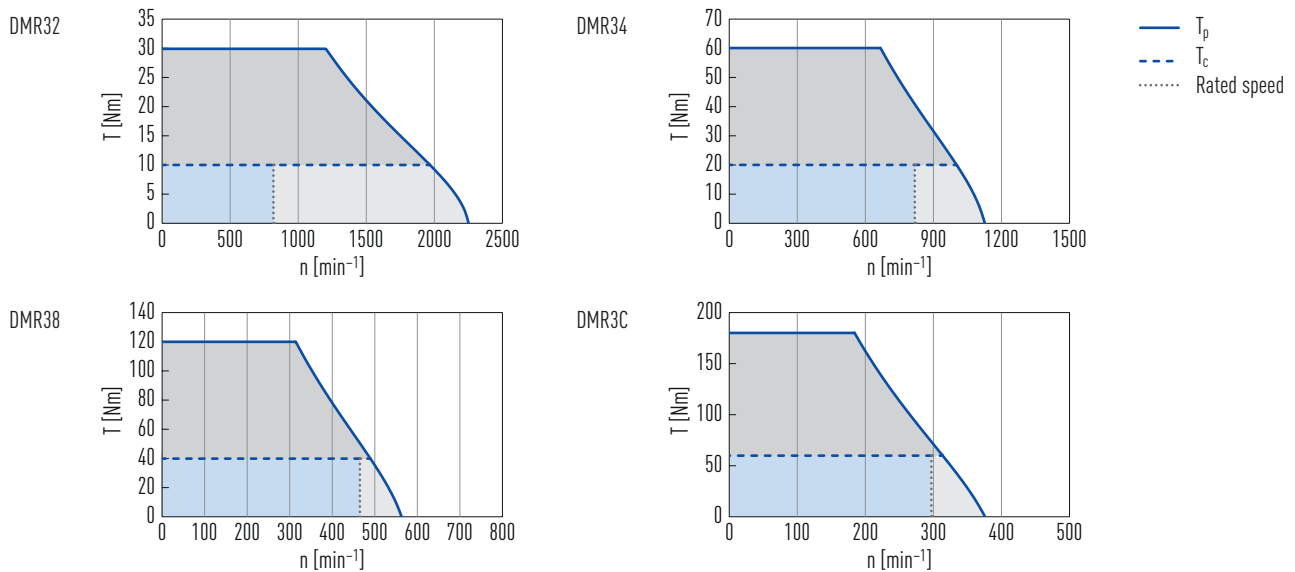


Table 3.3 Technical data for DMR3


	Symbol	Unit	DMR32	DMR34	DMR38	DMR3C
Torques and electrical parameters						
Peak torque (for 1 sec.)	T _p	Nm	30	60	120	180
Continuous torque ¹⁾	T _c	Nm	10	20	40	60
Stall torque	T _s	Nm	7	14	28	42
Peak current (for 1 sec.)	I _p	A	10.2	10.2	10.2	10.2
Continuous current ¹⁾	I _c	A	3.4	3.4	3.4	3.4
Stall current	I _s	A	2.4	2.4	2.4	2.4
Resistance ²⁾	R ₂₅	Ω	5.0	7.5	12.0	17.1
Inductance ²⁾	L ₂₅	mH	20.6	34.6	53.6	84.4
Motor constant	K _m	Nm/√W	1.1	1.8	2.8	3.6
Electrical time constant	K _e	ms	4.1	4.6	4.5	4.9
Torque constant	K _t	Nm/A	3	6	12	18
Back emf constant	K _u	V _{eff} /rad/s	1.5	3.0	6.0	9.0
Inertia of rotor	J	kgm ²	0.002	0.005	0.009	0.014
Thermal resistance	R _{th}	°C/W	1.1	0.73	0.46	0.32
Thermal time constant	T _{th}	s	1,980	2,020	2,130	2,170
Max. DC bus voltage	U _{max}	VDC	600			
Rated speed	n _N	min ⁻¹	818	818	465	297
Mechanical parameters						
Number of poles	2p		22			
Thermal sensor			PTC SNM 120			
Stator height	H _S	mm	60	80	120	160
Rotor height	H _R	mm	20	40	80	120
Mass of motor	M _m	kg	5.7	8.2	13.2	18.1

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature

¹⁾ Coil temperature: 120 °C

²⁾ Line to line

Dimensions DMR3

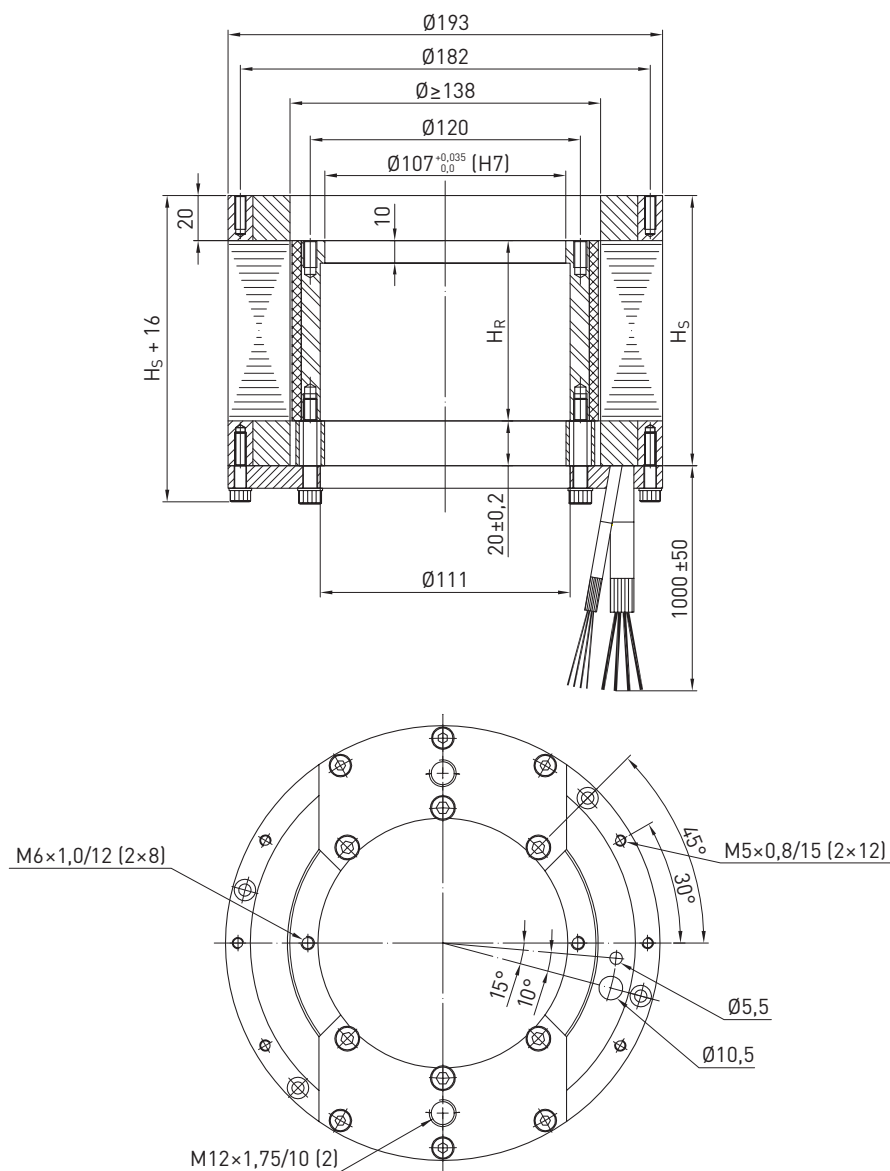

Torque Motors

HIWIN torque motors DMR

3.4.4 DMR7 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

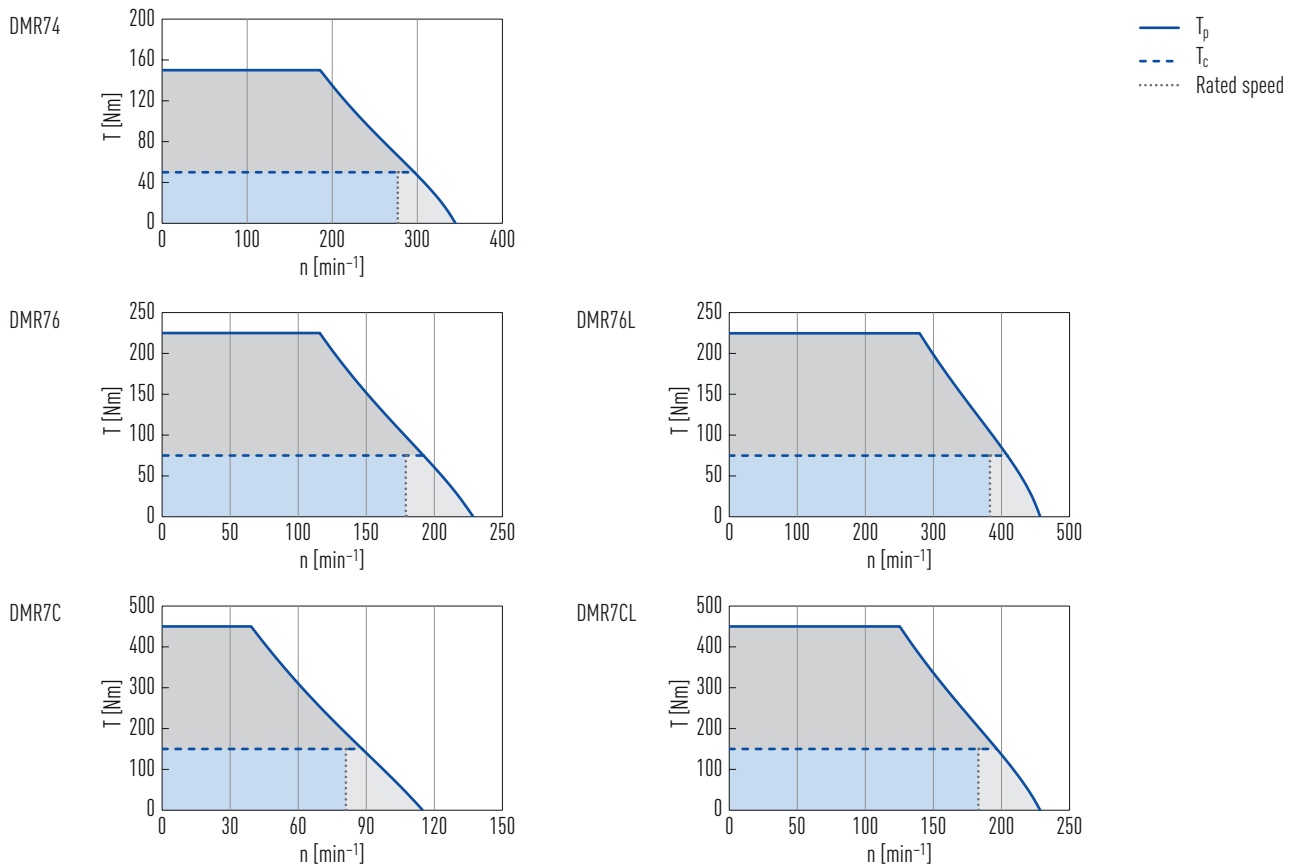


Table 3.4 Technical data for DMR7

	Symbol	Unit	DMR74	DMR76	DMR76L	DMR7C	DMR7CL
Torques and electrical parameters							
Peak torque (for 1 sec.)	T_p	Nm	150	225		450	
Continuous torque ¹⁾	T_c	Nm	50	75		150	
Stall torque	T_s	Nm	35.0	52.5		105.0	
Peak current (for 1 sec.)	I_p	A	10.2	10.2	20.4	10.2	20.4
Continuous current ¹⁾	I_c	A	3.4	3.4	6.8	3.4	6.8
Stall current	I_s	A	2.4	2.4	4.8	2.4	4.8
Resistance ²⁾	R_{25}	Ω	12.9	17.0	4.3	29.0	7.3
Inductance ²⁾	L_{25}	mH	55.0	76.0	19.0	145.0	36.3
Motor constant	K_m	Nm/ $\sqrt{W}$	3.9	5.1	5.0	7.7	7.7
Electrical time constant	K_e	ms	4.3	4.5	4.4	5.0	5.0
Torque constant	K_t	Nm/A	17.0	25.6	12.8	51.1	25.5
Back emf constant	K_u	$V_{eff}/(rad/s)$	9.8	14.8	7.4	29.5	14.8
Inertia of rotor	J	kgm ²	0.044	0.061		0.11	
Thermal resistance	R_{th}	$^{\circ}C/W$	0.42	0.32		0.19	
Thermal time constant	T_{th}	s	2,230	2,330		2,350	
Max. DC bus voltage	U_{max}	VDC	600				
Rated speed	n_N	min ⁻¹	277	179	383	81	183

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

¹⁾ Coil temperature: 120 $^{\circ}C$

²⁾ Line to line

Table 3.4 **Technical data for DMR7**


	Symbol	Unit	DMR74	DMR76	DMR76L	DMR7C	DMR7CL
Mechanical parameters							
Number of poles	2p		44				
Thermal sensor			PTC SNM 120				
Stator height	H _S	mm	80	100		160	
Rotor height	H _R	mm	40	60		120	
Mass of motor	M _m	kg	15.9	20.4		33.7	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 °C ambient temperature

¹⁾ Coil temperature: 120 °C

²⁾ Line to line

Dimensions DMR7

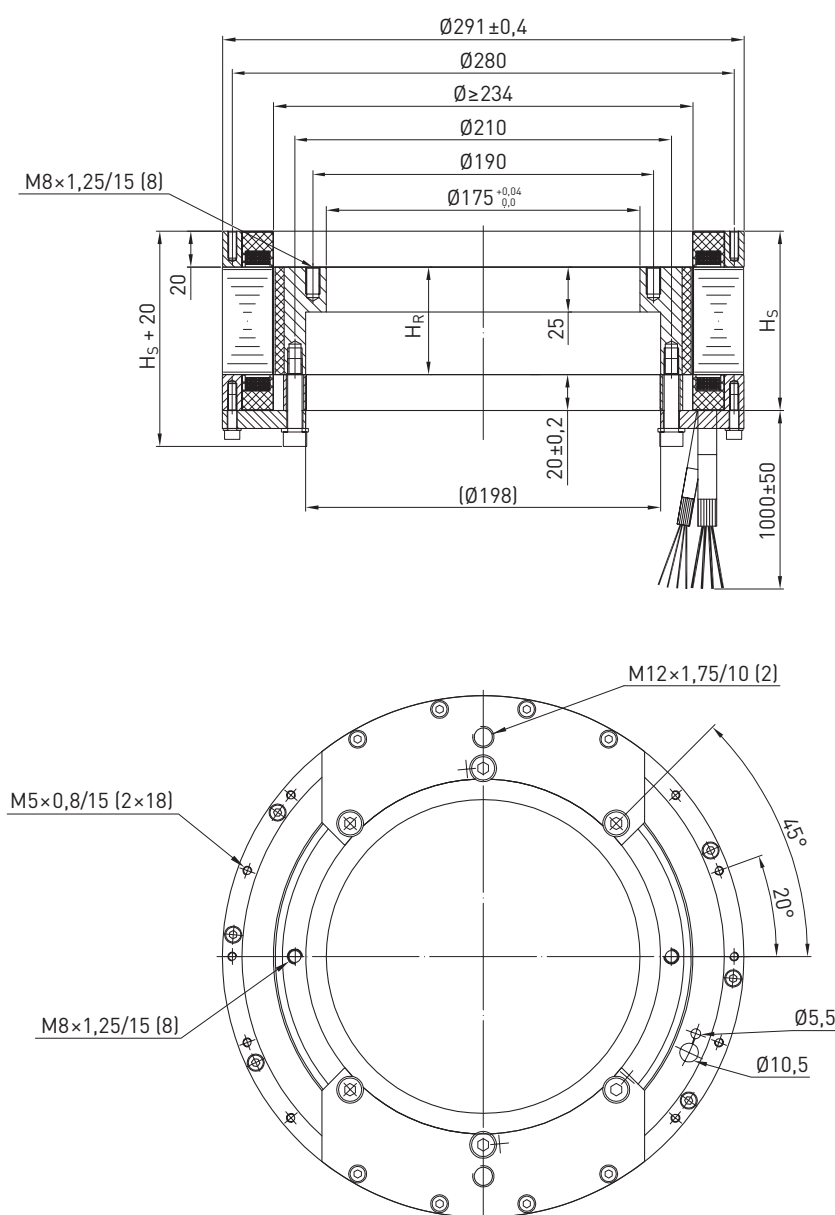

HIWIN torque motors TM-2

4.1 Special characteristics of the torque motors TM-2

Due to the integrated cooling channels, the torque motor can be operated with liquid cooling. No additional process heat is then introduced into the machine and higher continuous torques can be achieved.

The torque motors of the TM-2 series are based on the well-proven TMRW series. However, with identical dimensions, they are characterised by significantly higher torques as well as a reduced cogging moment.



- Optimised for highest torques
- Wear- and maintenance-free direct drive
- Play-free and highly precise
- Prepared for liquid cooling
- III-certified

- Machine tools
- Servo presses
- Laser processing

TM-2	7	5	SA0	1	20	S	00
------	---	---	-----	---	----	---	----

Series: TM-2

Outer diameter [mm]:

1: 160

2: 198

4: 230

7: 310

A: 385

D: 485

G: 565

Rotor height [mm]:

3: 30

5: 50

7: 70

A: 100

F: 150

Winding variant

Special equipment:

00: Rotor and stator separately (standard)

03: Rotor and stator mounted with installation clamp

Cable outlet orientation:

S: Motor cables potted in the stator (standard)

V: Type S with additional strain relief plate

A: Type V with additional PG screw connections

H: Type V with 90° cable outlet

Cable length:

05: 500

10: 1,000


20: 2,000 (standard)

Thermal sensors:

0: 3 × PTC100, 3 × PTC130, 1 × PT1000 (standard)

1: 3 × PTC100, 3 × PTC130, 3 × PT1000

4.3 TM-2 torques

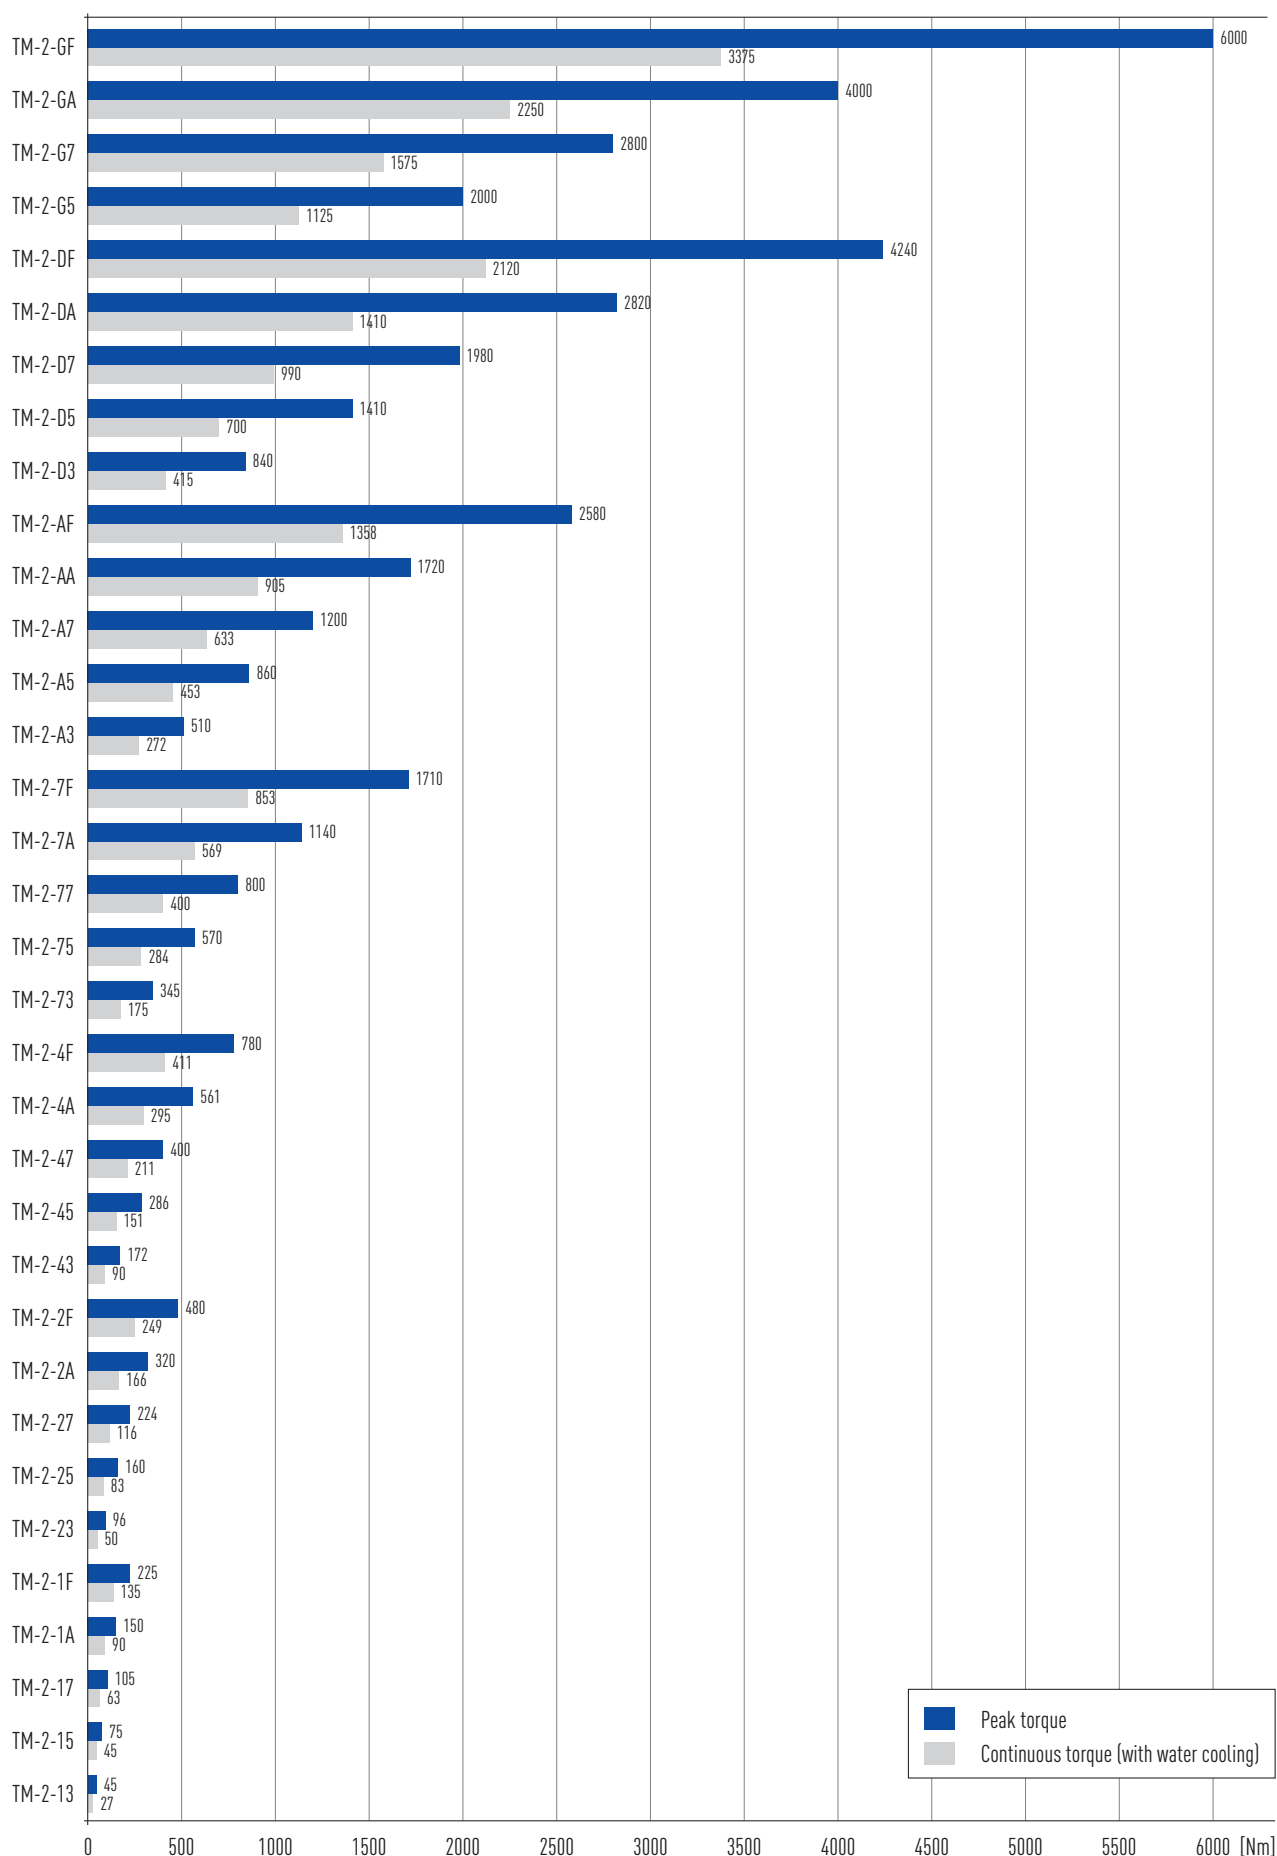

Torque Motors

HIWIN torque motors TM-2

4.4 Torque motor TM-2 specifications

4.4.1 TM-2-1 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

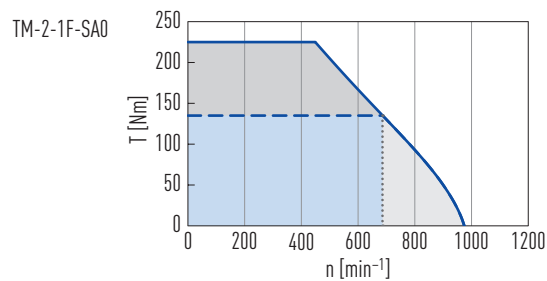
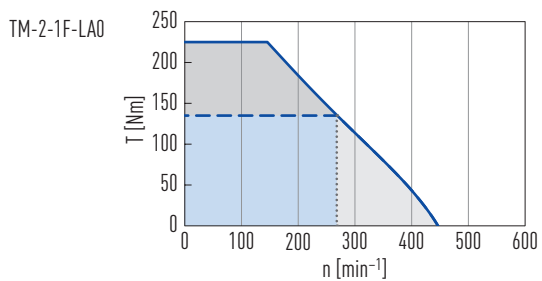
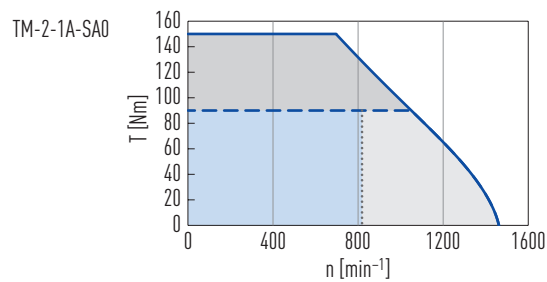
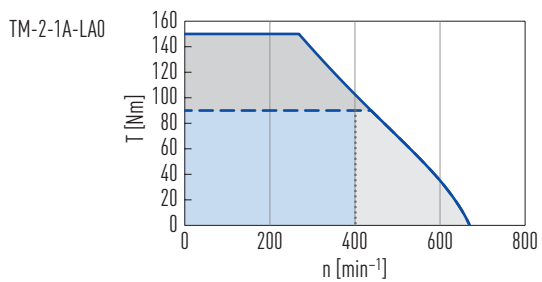
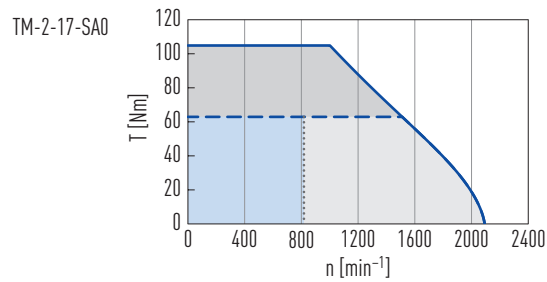
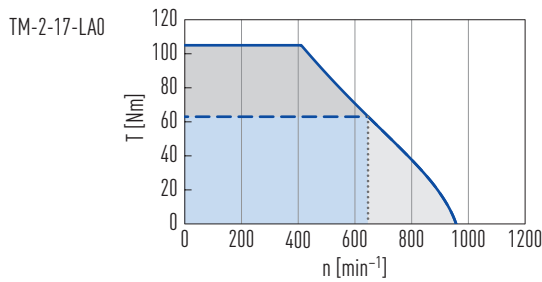
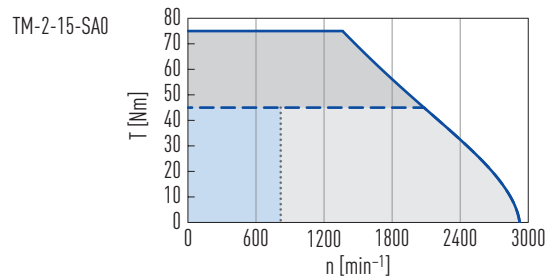
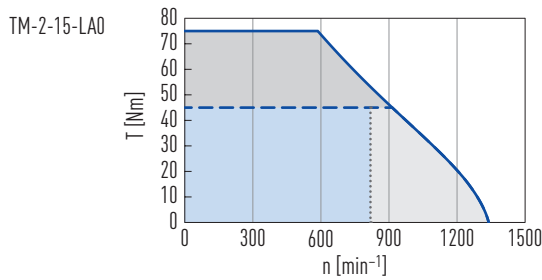
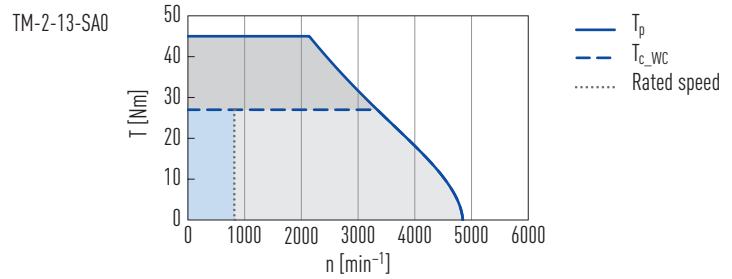
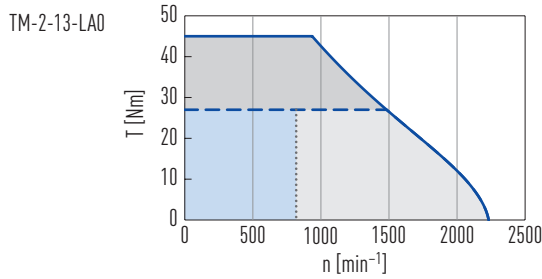


Table 4.1 Technical data for TM-2-1

	Symbol	Unit	TM-2-13-LA0	TM-2-13-SA0	TM-2-15-LA0	TM-2-15-SA0	TM-2-17-LA0	TM-2-17-SA0	TM-2-1A-LA0	TM-2-1A-SA0	TM-2-1F-LA0	TM-2-1F-LA0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	45		75		105		150		225	
Continuous torque (WC)	T_{c_WC}	Nm	27		45		63		90		135	
Stall torque (WC)	T_{s_WC}	Nm	22		37		52		74		111	
Peak current (for 1 sec.)	I_p	A	20.0	43.4	20.0	43.4	20.0	43.4	20.0	43.4	20.0	43.4
Continuous current (WC)	I_{c_WC}	A	10.3	22.3	10.3	22.3	10.3	22.3	10.3	22.3	10.3	22.3
Stall current (WC)	I_{s_WC}	A	8.2	17.8	8.2	17.8	8.2	17.8	8.2	17.8	8.2	17.8
Resistance ¹⁾	R_{25}	Ω	3.5	0.7	5.1	1.1	6.8	1.4	9.2	2.0	13.3	2.8
Inductance ¹⁾	L_{25}	mH	17.1	3.6	25.2	5.4	33.3	7.1	45.5	9.7	65.8	14.0
Motor constant	K_m	Nm/ $\sqrt{W}$	1.25	1.26	1.72	1.68	2.09	2.09	2.57	2.49	3.20	3.16
Electrical time constant	K_e	ms	4.9	5.1	4.9	4.9	4.9	5.1	4.9	4.9	4.9	5.0
Torque constant	K_t	Nm/A	2.86	1.32	4.76	2.18	6.67	3.05	9.53	4.36	14.29	6.55
Back emf constant	K_u	$V_{eff}/(rad/s)$	1.65	0.76	2.75	1.26	3.85	1.76	5.50	2.52	8.25	3.78
Inertia of rotor	J	kgm ²	0.0010		0.0016		0.0023		0.0033		0.0049	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.189	0.201	0.129	0.128	0.097	0.101	0.072	0.070	0.050	0.050
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	1,482	3,338	913	2,080	646	1,510	401	1,049	268	686
Max. speed at T_p	n	min ⁻¹	935	2,138	585	1,362	410	1,001	245	695	145	448
Rated speed	n_N	min ⁻¹	818	818	818	818	646	818	401	818	268	686
Mechanical parameters												
Number of poles	2p		22									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	70		90		110		140		190	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M_r	kg	0.7		1.2		1.6		2.3		3.5	
Stator mass	M_s	kg	4.5		6.4		8.0		11.1		16.0	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

WC: with water cooling

¹⁾ Line to line

HIWIN torque motors TM-2


[illegible]

Technical drawing of a circular flange. The drawing shows a cross-section of the flange with a central hole. The outer diameter is labeled $\varnothing 5H8/9 (2 \times)$. The inner diameter is labeled $\varnothing 5H8/10 (2 \times)$. The flange has a thickness of $22,5^\circ$. The outer edge has a chamfer with a 45° angle. The inner hole has a chamfer with a 30° angle. The flange is secured with 16 screws, labeled $M5 \times 0,8/10 (2 \times 8)$. The drawing includes a coordinate system with X and Y axes.

Technical drawing of a circular flange with two concentric rings of holes. The outer ring has 16 holes with dimensions $M5 \times 0,8/10 [2 \times 16]$. The inner ring has 15 holes with dimensions $M5 \times 0,8/10 [2 \times 15]$. There are also 2 holes with dimensions $\varnothing 5 H8/9 [2 \times]$ and 2 holes with dimensions $\varnothing 5 H8/10 [2 \times]$. A 30° angle is indicated between a hole and a centerline, and a $22,5^\circ$ angle is indicated between a hole and a centerline. A force X is shown acting on one of the outer holes.

4.4.2 TM-2-2 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

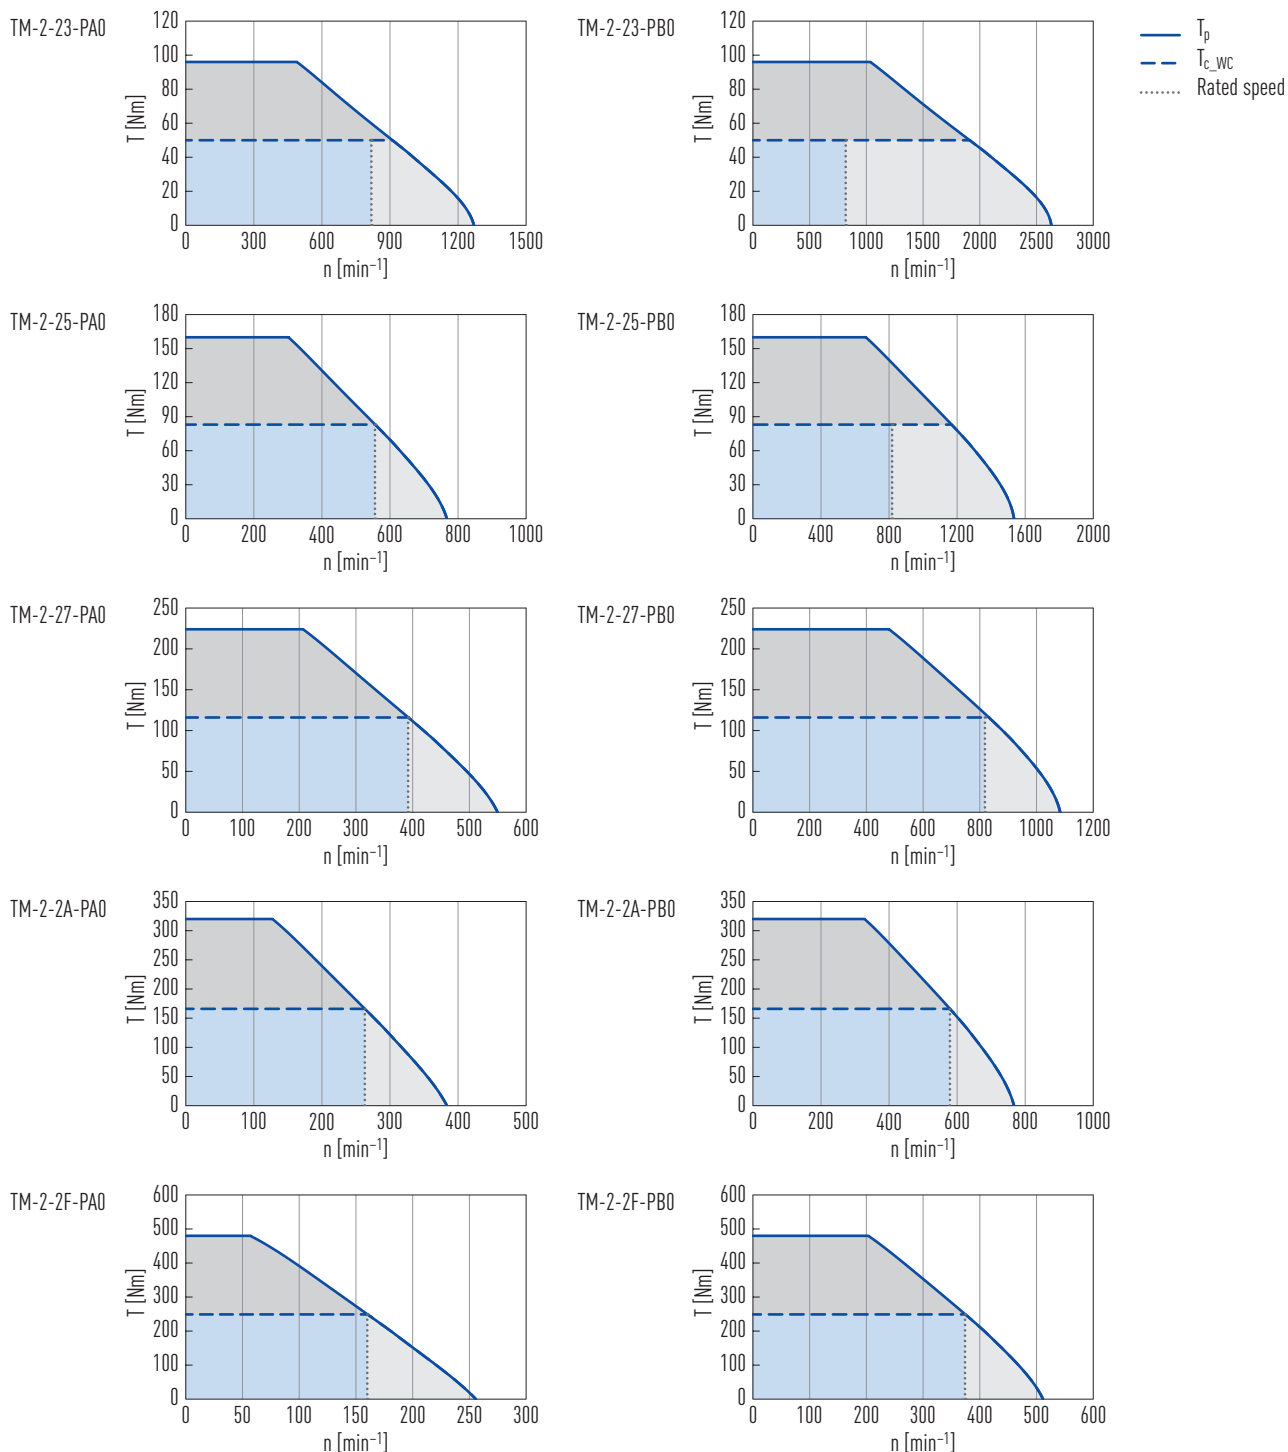

Torque Motors

HIWIN torque motors TM-2

Table 4.2 Technical data for TM-2-2


	Symbol	Unit	TM-2-23-PA0	TM-2-23-PB0	TM-2-25-PA0	TM-2-25-PB0	TM-2-27-PA0	TM-2-27-PB0	TM-2-2A-PA0	TM-2-2A-PB0	TM-2-2F-PA0	TM-2-2F-PB0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	96		160		224		320		480	
Continuous torque (WC)	T_{c_WC}	Nm	50		83		116		166		249	
Stall torque (WC)	T_{s_WC}	Nm	41	41	68	68	95	95	136	135	204	203
Peak current (for 1 sec.)	I_p	A	25.5	51.0	25.5	51.0	25.5	51.0	25.5	51.0	25.5	51.0
Continuous current (WC)	I_{c_WC}	A	10.2	20.4	10.2	20.4	10.2	20.4	10.2	20.4	10.2	20.4
Stall current (WC)	I_{s_WC}	A	8.2	16.3	8.2	16.3	8.2	16.3	8.2	16.3	8.2	16.3
Resistance ¹⁾	R_{25}	Ω	3.5	0.9	5.2	1.3	6.9	1.7	9.4	2.4	13.6	3.4
Inductance ¹⁾	L_{25}	mH	25.5	6.4	37.6	9.4	49.7	12.4	68.0	17.0	98.2	24.6
Motor constant	K_m	Nm/ $\sqrt{W}$	2.17	2.14	2.98	2.98	3.62	3.65	4.43	4.38	5.52	5.52
Electrical time constant	K_e	ms	7.3	7.1	7.2	7.2	7.2	7.3	7.2	7.1	7.2	7.2
Torque constant	K_t	Nm/A	5.02	2.42	8.31	4.16	11.60	5.89	16.63	8.31	24.94	12.47
Back emf constant	K_u	$V_{eff}/(rad/s)$	2.9	1.4	4.8	2.4	6.7	3.4	9.6	4.8	14.4	7.2
Inertia of rotor	J	kgm ²	0.0010		0.0016		0.0023		0.0033		0.0049	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.192	0.187	0.129	0.129	0.098	0.099	0.072	0.070	0.049	0.049
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	911	1,911	556	1,167	392	832	263	579	160	374
Max. speed at T_p	n	min ⁻¹	489	1,034	301	663	206	479	127	328	56	203
Rated speed	n_N	min ⁻¹	818	818	556	818	392	818	263	579	160	374
Mechanical parameters												
Number of poles	2p		22									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	80		100		120		150		200	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M_r	kg	1.0		1.7		2.3		3.3		5.5	
Stator mass	M_s	kg	6.9		10.5		12.0		16.7		23.9	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature


WC: with water cooling

¹⁾ Line to line


Dimensions TM-2-2

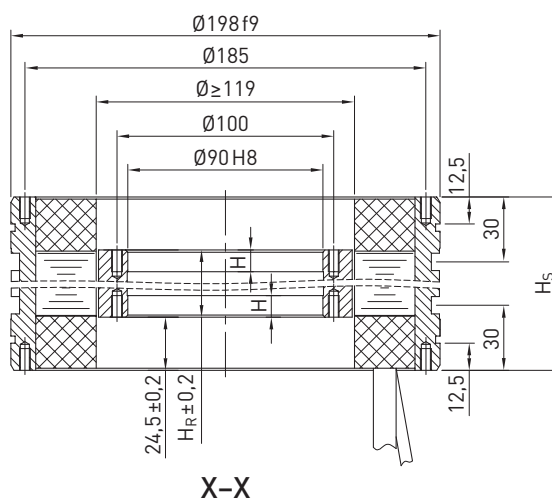

TM-2-23, TM-2-25, TM-2-27

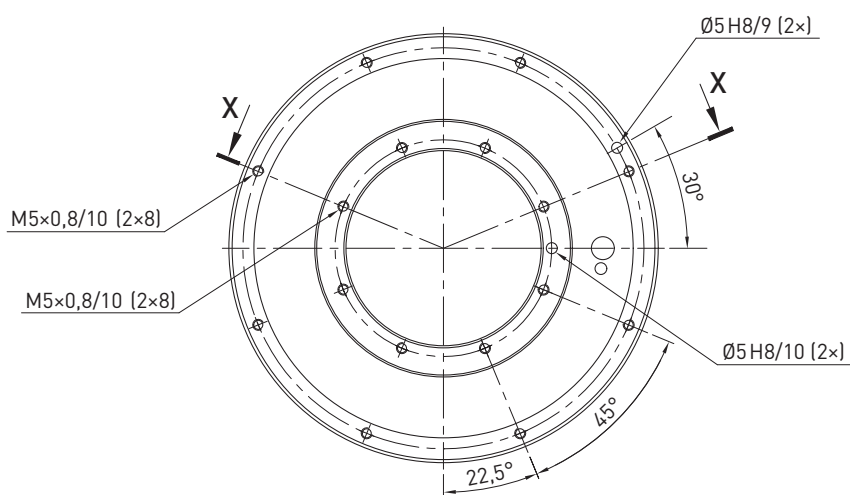

TM-2-2A, TM-2-2F

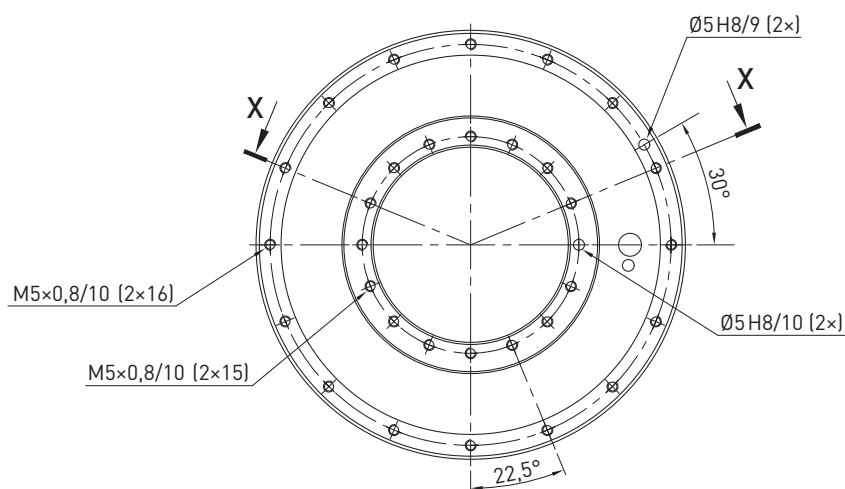

Torque Motors

HIWIN torque motors TM-2

4.4.3 TM-2-4 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

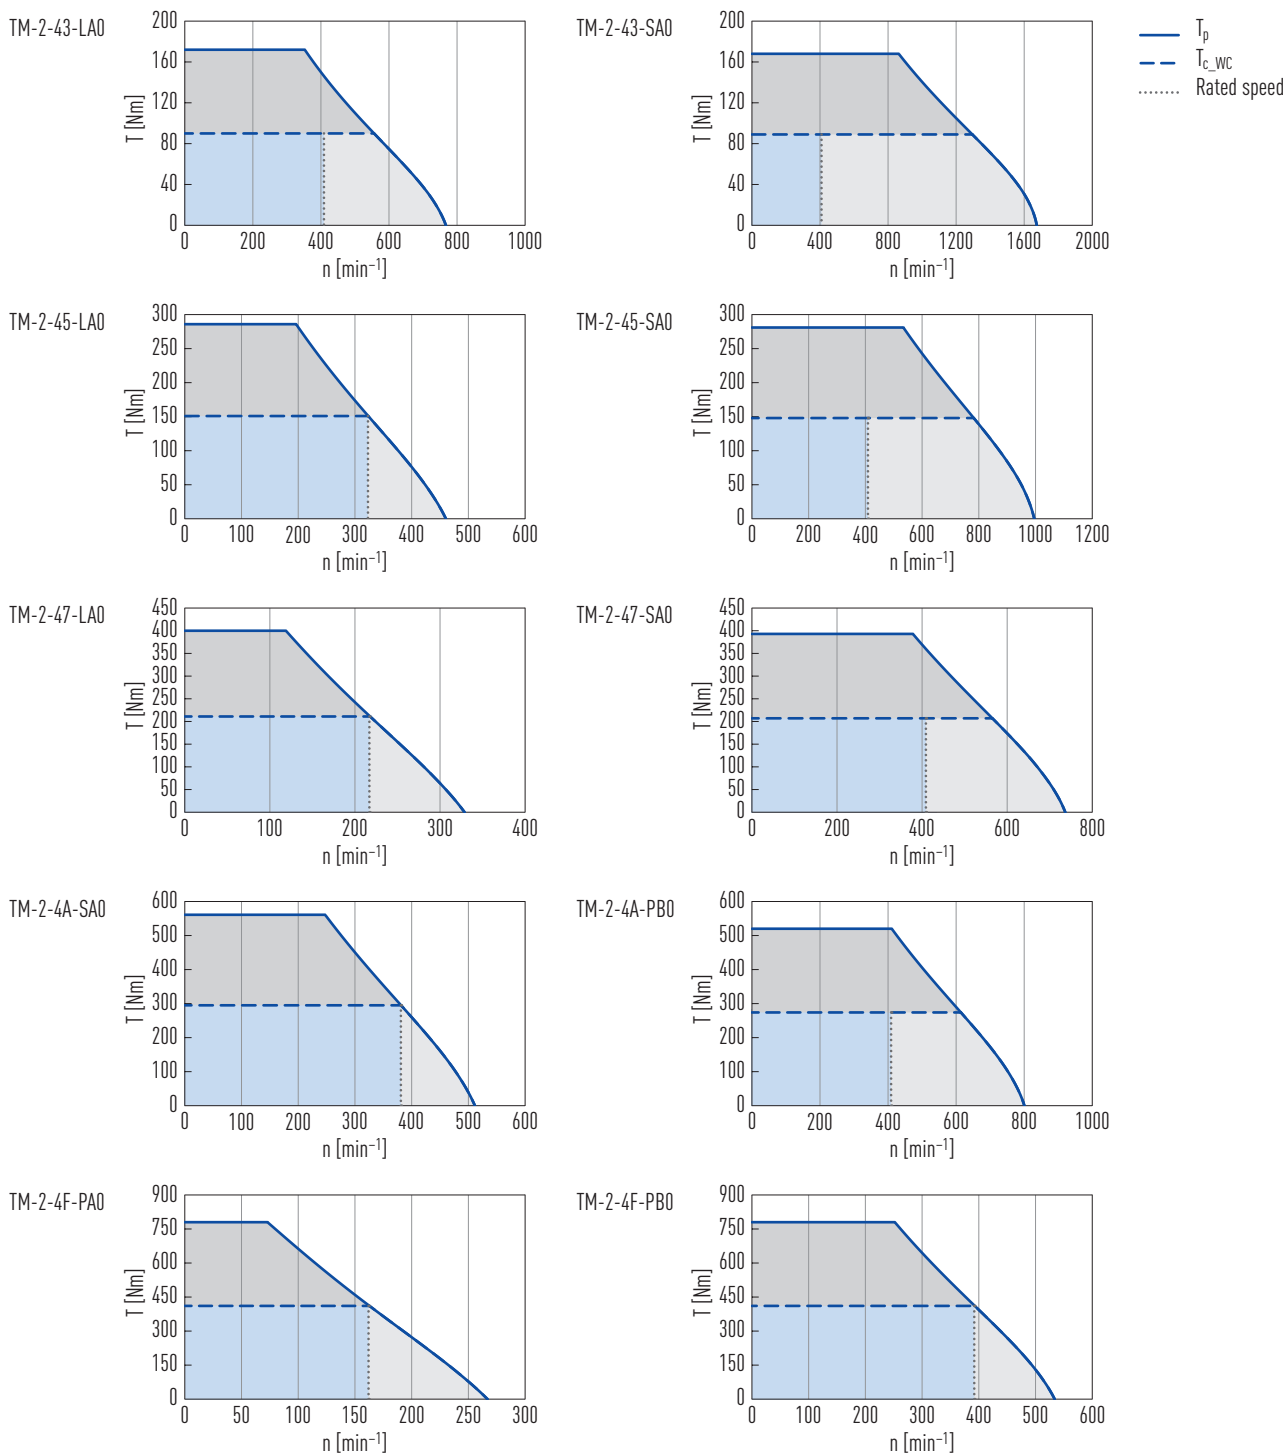


Table 4.3 Technical data for TM-2-4

	Symbol	Unit	TM-2-43-LA0	TM-2-43-SA0	TM-2-45-LA0	TM-2-45-SA0	TM-2-47-LA0	TM-2-47-SA0	TM-2-4A-SA0	TM-2-4A-PB0	TM-2-4F-PA0	TM-2-4F-PB0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	172	168	286	281	400	393	561	520	780	780
Continuous torque (WC)	T_{c_WC}	Nm	90	89	151	148	211	207	295	274	411	411
Stall torque (WC)	T_{s_WC}	Nm	73	72	122	120	171	168	239	222	334	334
Peak current (for 1 sec.)	I_p	A	23.7	52.0	23.7	52.0	23.7	52.0	52.0	75.0	37.5	75.0
Continuous current (WC)	I_{c_WC}	A	11.4	24.9	11.4	24.9	11.4	24.9	24.9	36.0	18.0	36.0
Stall current (WC)	I_{s_WC}	A	9.1	19.9	9.1	19.9	9.1	19.9	19.9	28.8	14.4	28.8
Resistance ¹⁾	R_{25}	Ω	5.60	1.20	8.30	1.72	11.00	2.30	3.10	1.50	8.70	2.17
Inductance ¹⁾	L_{25}	mH	15.80	3.30	23.30	4.84	30.80	6.41	8.75	4.20	24.30	6.08
Motor constant	K_m	Nm/ $\sqrt{W}$	2.86	2.84	3.89	3.93	4.71	4.60	5.74	5.27	6.59	6.60
Electrical time constant	K_e	ms	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8
Torque constant	K_t	Nm/A	8.31	3.81	13.86	6.41	19.40	8.66	12.47	7.97	23.90	11.95
Back emf constant	K_u	$V_{eff}/(rad/s)$	4.8	2.2	8.0	3.7	11.2	5.0	7.2	4.6	13.8	6.9
Inertia of rotor	J	kgm ²	0.0085		0.0140		0.0220		0.0290		0.0450	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.096	0.094	0.065	0.066	0.049	0.049	0.036	0.036	0.025	0.025
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	556	1,295	323	782	217	565	381	614	162	392
Max. speed at T_p	n	min ⁻¹	352	862	196	533	118	378	247	410	72	251
Rated speed	n_N	min ⁻¹	409	409	323	409	217	409	381	409	162	392
Mechanical parameters												
Number of poles	2p		44									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	70		90		110		140		190	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M_r	kg	1.5		2.6		3.5		5.0		7.6	
Stator mass	M_s	kg	6.5		9.0		11.2		15.0		22.2	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature


WC: with water cooling

¹⁾ Line to line


Torque Motors

HIWIN torque motors TM-2


Dimensions TM-2-4

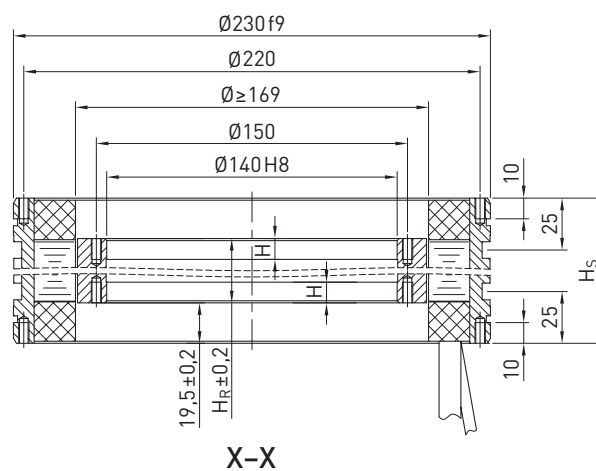

TM-2-43, TM-2-45, TM-2-47


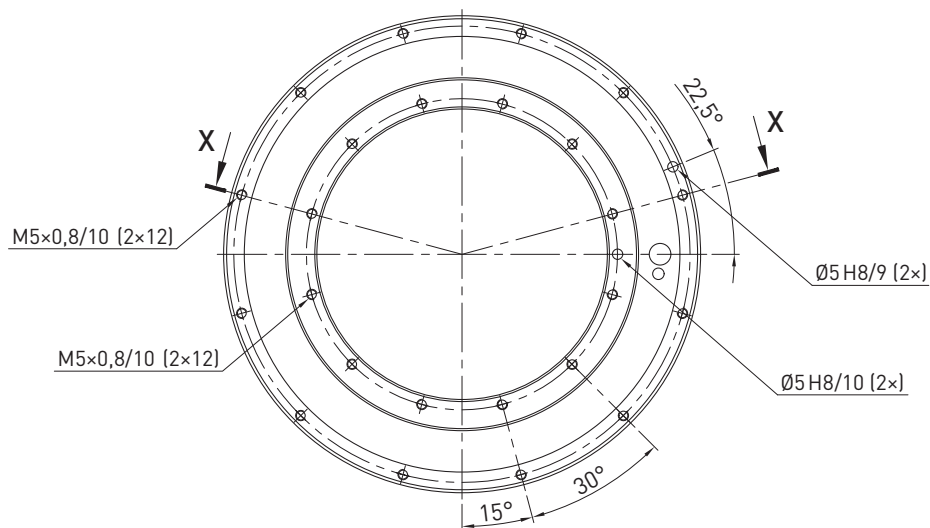


TM-2-4A, TM-2-4F








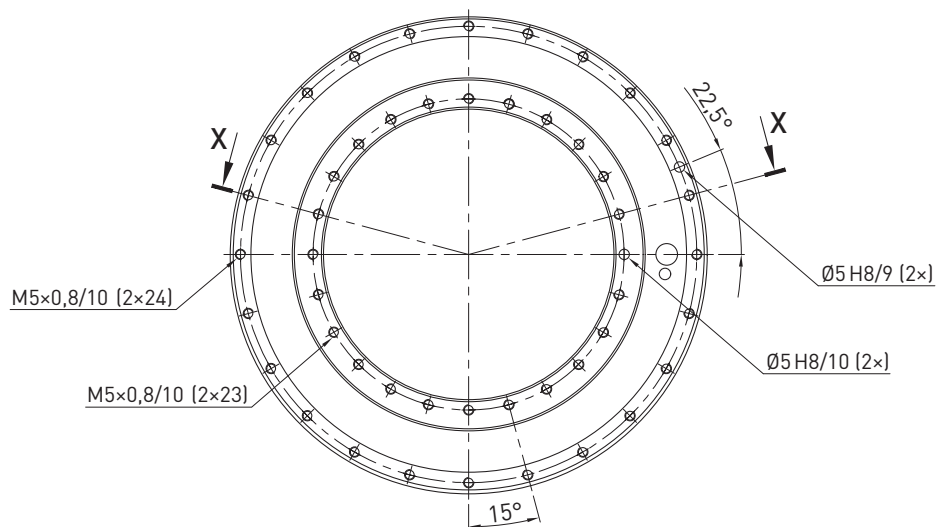


4.4.4 TM-2-7 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

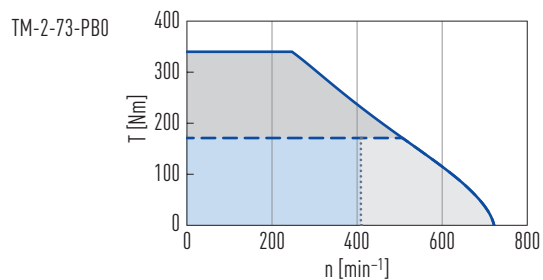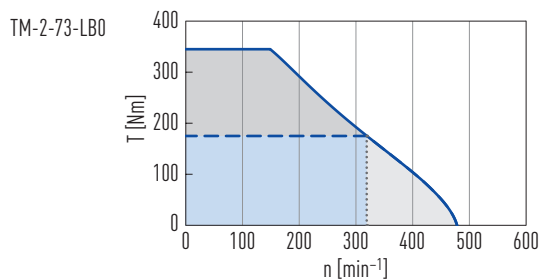

— T_p
- - - T_{c_wc}
..... Rated speed

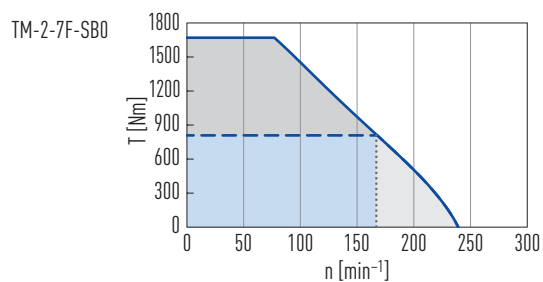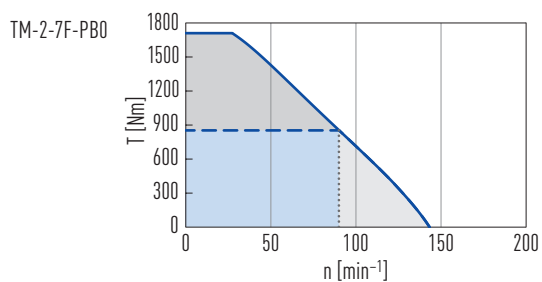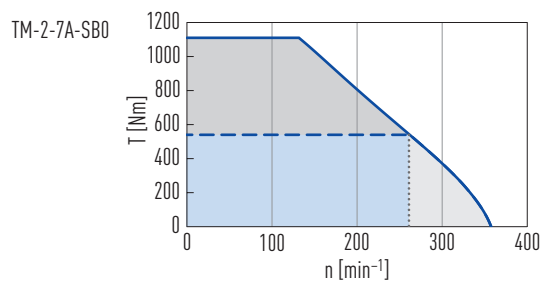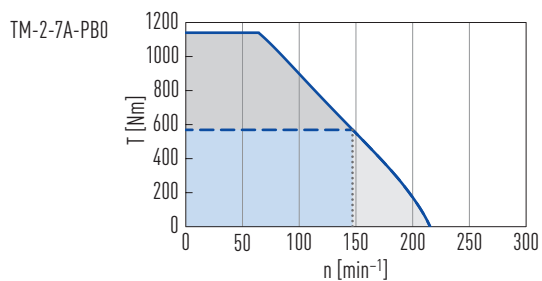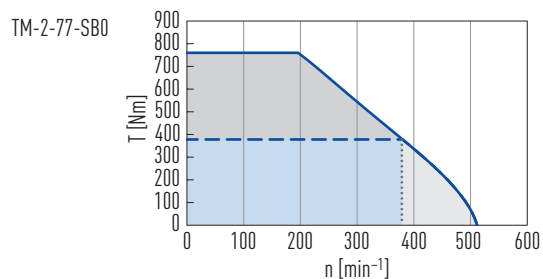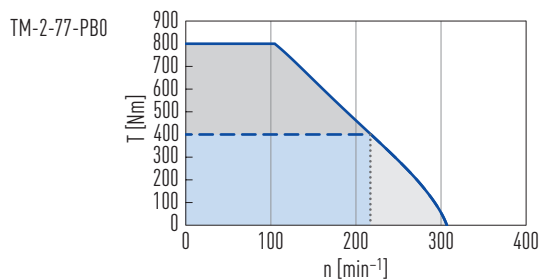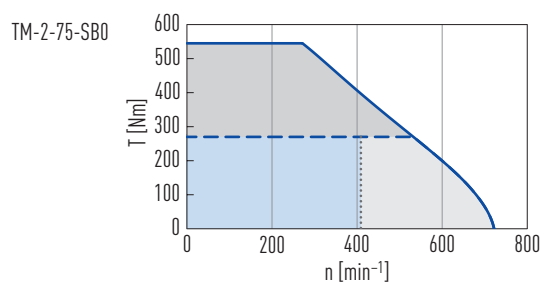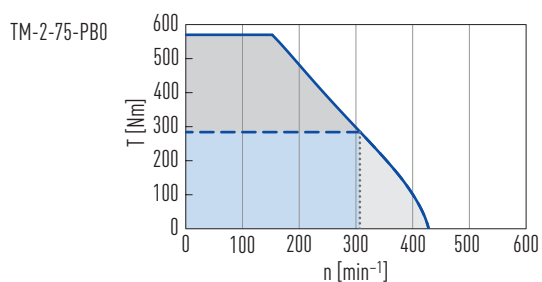

Torque Motors

HIWIN torque motors TM-2

Table 4.4 Technical data for TM-2-7


	Symbol	Unit	TM-2-73-LA0	TM-2-73-PB0	TM-2-75-PB0	TM-2-75-SB0	TM-2-77-PB0	TM-2-77-SB0	TM-2-7A-PB0	TM-2-7A-SB0	TM-2-7F-PB0	TM-2-7F-SB0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	345	340	570	545	800	760	1,140	1,110	1,710	1,670
Continuous torque (WC)	T_{c_WC}	Nm	175	171	284	270	400	378	569	540	853	809
Stall torque (WC)	T_{s_WC}	Nm	144	141	233	222	329	310	468	442	701	663
Peak current (for 1 sec.)	I_p	A	38.1	56.0	56.0	88.3	56.0	88.3	56.0	88.3	56.0	88.3
Continuous current (WC)	I_{c_WC}	A	14.0	20.5	20.5	32.3	20.5	32.3	20.5	32.3	20.5	32.3
Stall current (WC)	I_{s_WC}	A	11.2	16.4	16.4	25.8	16.4	25.8	16.4	25.8	16.4	25.8
Resistance ¹⁾	R_{25}	Ω	3.5	1.7	2.5	1.0	3.3	1.3	4.5	1.8	6.5	2.6
Inductance ¹⁾	L_{25}	mH	27.7	11.8	17.4	6.7	23.0	8.8	31.4	12.0	45.4	17.4
Motor constant	K_m	Nm/ $\sqrt{W}$	5.82	5.58	7.63	7.26	9.33	8.89	11.42	10.79	14.24	13.48
Electrical time constant	K_e	ms	7.9	6.9	7.0	6.7	7.0	6.8	7.0	6.7	7.0	6.7
Torque constant	K_t	Nm/A	13.34	8.83	14.90	8.83	20.78	12.47	29.62	17.84	44.51	26.67
Back emf constant	K_u	$V_{eff}/(rad/s)$	7.7	5.1	8.6	5.1	12.0	7.2	17.1	10.3	25.7	15.4
Inertia of rotor	J	kgm ²	0.025		0.041		0.057		0.081		0.121	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.092	0.089	0.060	0.061	0.046	0.047	0.033	0.034	0.023	0.023
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	319	506	307	532	217	379	147	261	90	167
Max. speed at T_p	n	min ⁻¹	148	246	152	271	104	195	64	131	27	77
Rated speed	n_N	min ⁻¹	319	409	307	409	217	379	147	261	90	167
Mechanical parameters												
Number of poles	2p		44									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	80		100		120		150		200	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M_r	kg	2.2		3.6		5.0		7.1		11.6	
Stator mass	M_s	kg	13.6		17.9		22.3		28.9		40.6	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature


WC: with water cooling

¹⁾ Line to line


Dimensions TM-2-7

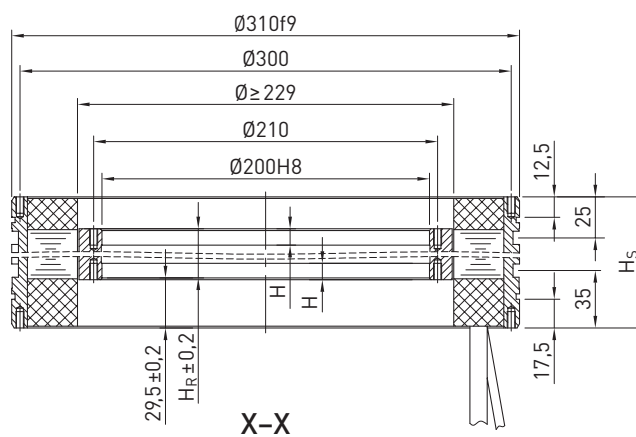

TM-2-73, TM-2-75, TM-2-77

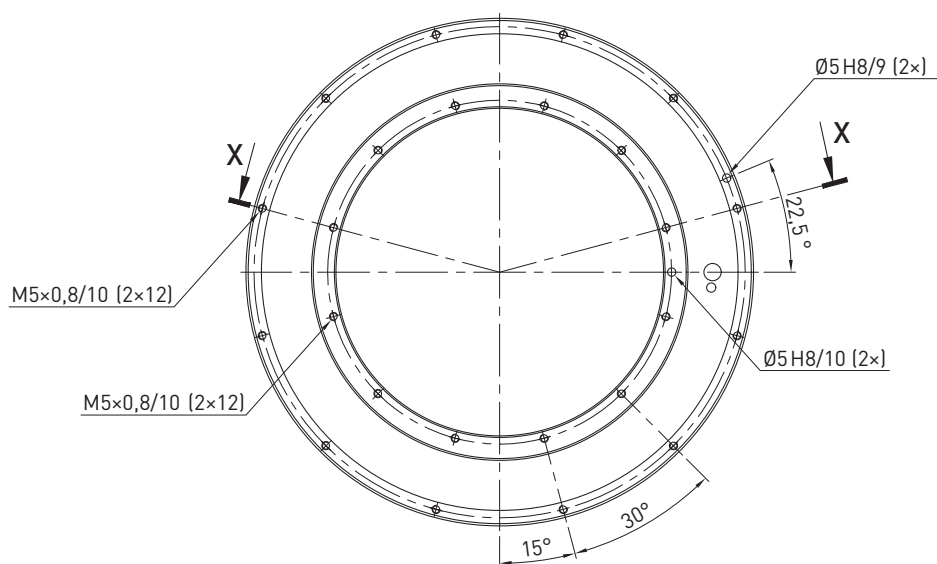

TM-2-7A, TM-2-7F


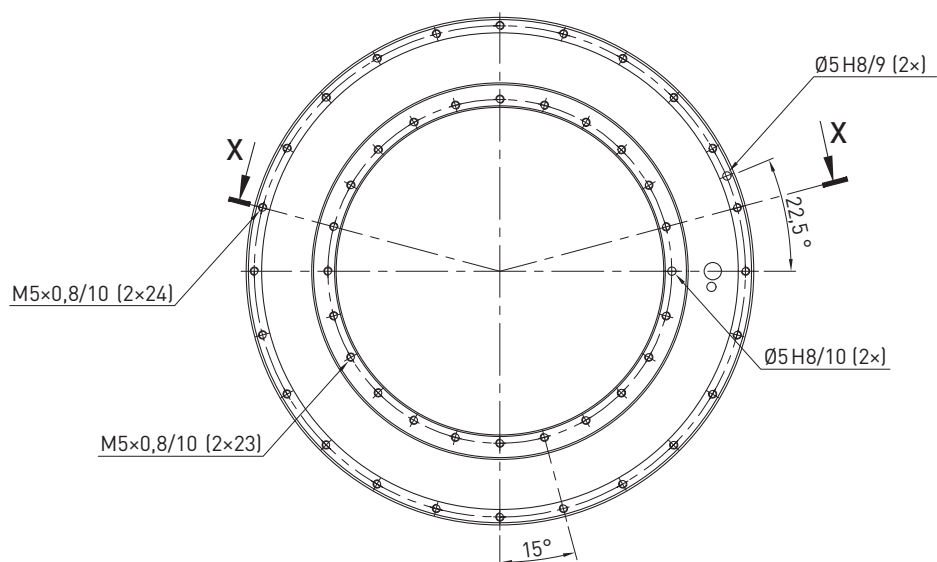


Torque Motors

HIWIN torque motors TM-2

4.4.5 TM-2-A specifications

Torque-speed curves (DC bus voltage: 600 VDC)

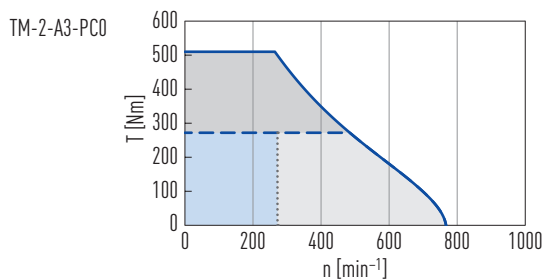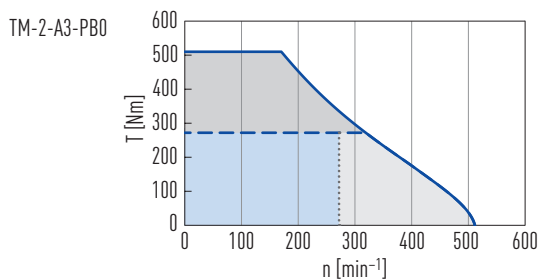

— T_p
- - T_{c_wc}
..... Rated speed

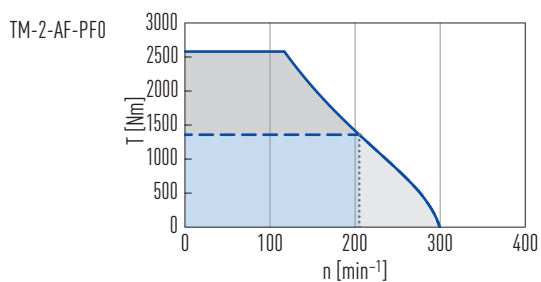
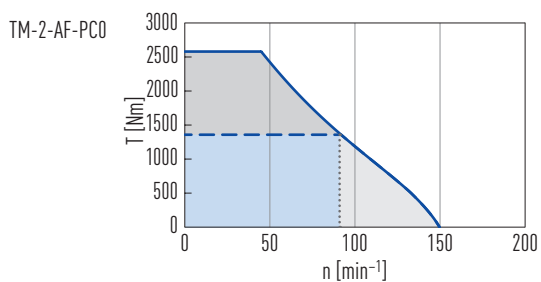
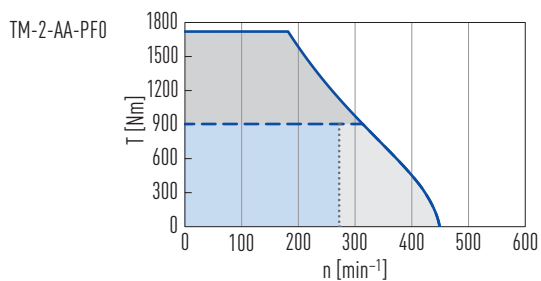
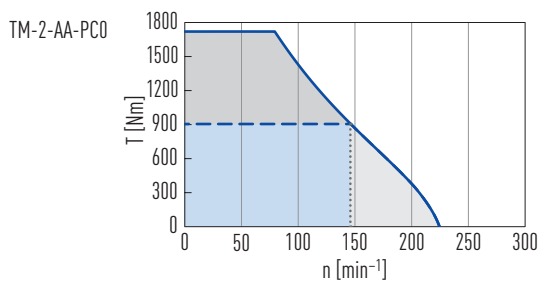
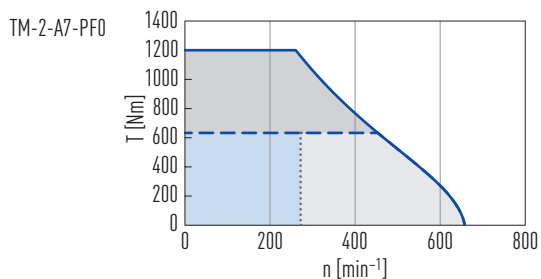
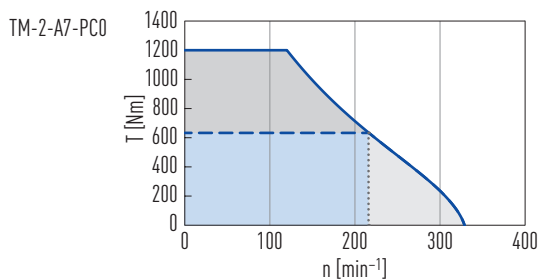
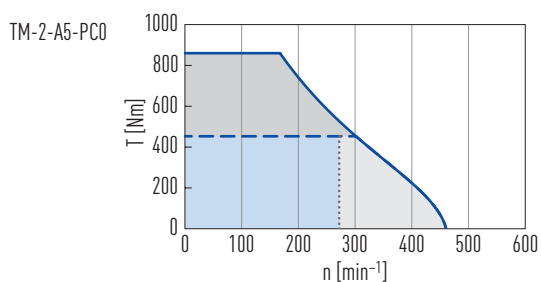
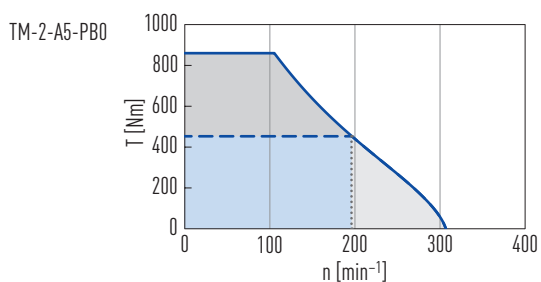


Table 4.5 Technical data for TM-2-A

	Symbol	Unit	TM-2-A3-PB0	TM-2-A3-PC0	TM-2-A5-PB0	TM-2-A5-PC0	TM-2-A7-PC0	TM-2-A7-PF0	TM-2-AA-PC0	TM-2-AA-PF0	TM-2-AF-PC0	TM-2-AF-PF0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	510		860		1,200		1,720		2,580	
Continuous torque (WC)	T_{c_WC}	Nm	272		453		633		905		1,358	
Stall torque (WC)	T_{s_WC}	Nm	222		371		518		743		1,114	
Peak current (for 1 sec.)	I_p	A	52	78	52	78	78	156	78	156	78	156
Continuous current (WC)	I_{c_WC}	A	23	35	23	35	35	70	35	70	35	70
Stall current (WC)	I_{s_WC}	A	18.4	28.0	18.4	28.0	28.0	56.0	28.0	56.0	28.0	56.0
Resistance ¹⁾	R_{25}	Ω	1.80	0.82	2.70	1.20	1.60	0.40	2.20	0.55	3.20	0.80
Inductance ¹⁾	L_{25}	mH	12.4	5.5	18.3	8.2	10.8	2.7	14.8	3.7	21.6	5.4
Motor constant	K_m	Nm/ $\sqrt{W}$	7.46	7.36	10.31	10.31	12.53	12.53	15.60	15.60	19.44	19.44
Electrical time constant	K_e	ms	6.9	6.7	6.8	6.8	6.8	6.8	6.7	6.7	6.8	6.8
Torque constant	K_t	Nm/A	12.47	8.31	20.78	13.86	19.40	9.70	28.41	14.20	42.61	21.30
Back emf constant	K_u	$V_{eff}/(rad/s)$	7.2	4.8	12.0	8.0	11.2	5.6	16.4	8.2	24.6	12.3
Inertia of rotor	J	kgm ²	0.065		0.108		0.151		0.214		0.320	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.074	0.070	0.049	0.048	0.036	0.036	0.026	0.026	0.018	0.018
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	319	484	196	301	216	453	146	313	91	205
Max. speed at T_p	n	min ⁻¹	170	264	105	167	120	260	79	181	44	116
Rated speed	n_N	min ⁻¹	272	272	196	272	216	272	146	272	91	205
Mechanical parameters												
Number of poles	2p		66									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	90		110		130		160		210	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M_r	kg	3.3		5.5		7.6		10.8		16.2	
Stator mass	M_s	kg	20.1	20.1	26.8	26.8	34.5	34.5	44.9	44.9	63.1	63.1

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature


WC: with water cooling

¹⁾ Line to line


Torque Motors

HIWIN torque motors TM-2


Dimensions TM-2-A

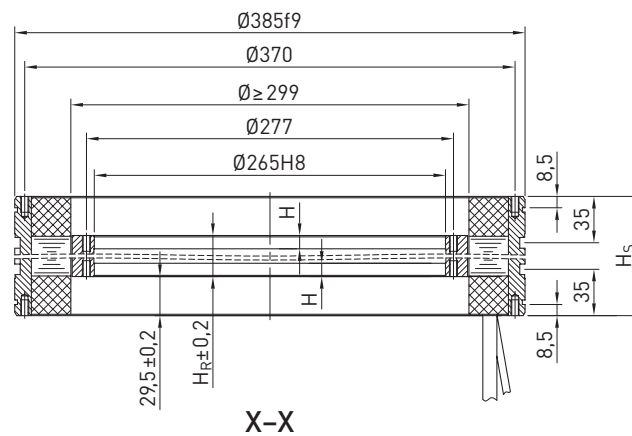

TM-2-A3, TM-2-A5, TM-2-A7










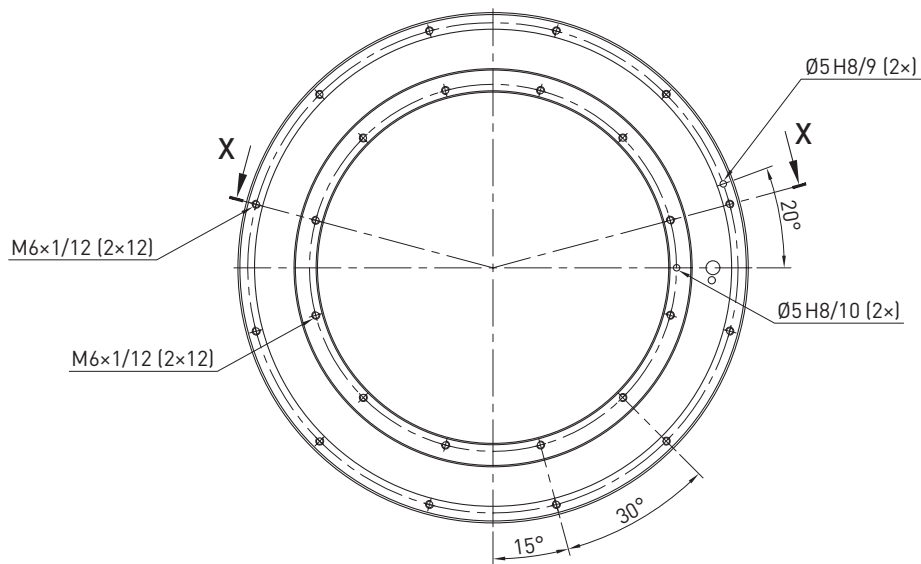


TM-2-AA, TM-2-AF

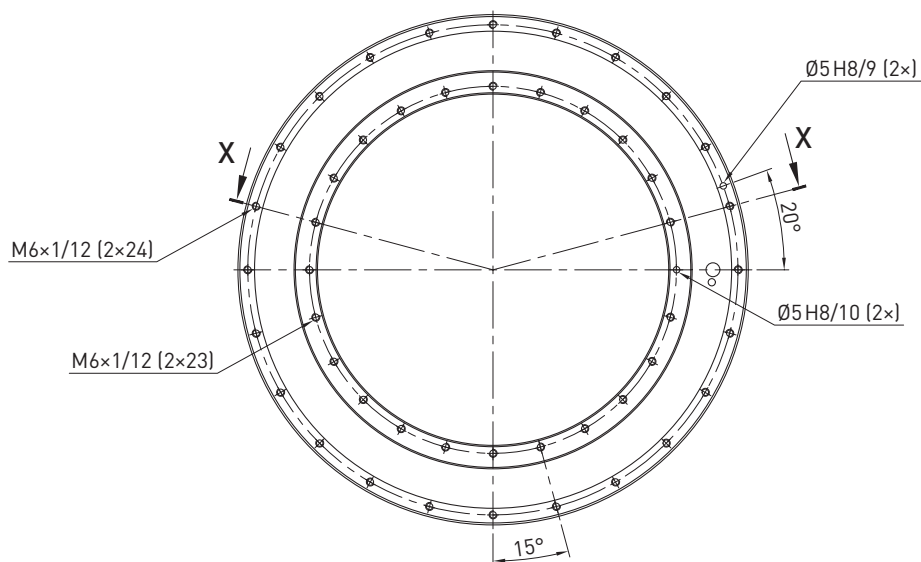

4.4.6 TM-2-D specifications

Torque-speed curves (DC bus voltage: 600 VDC)

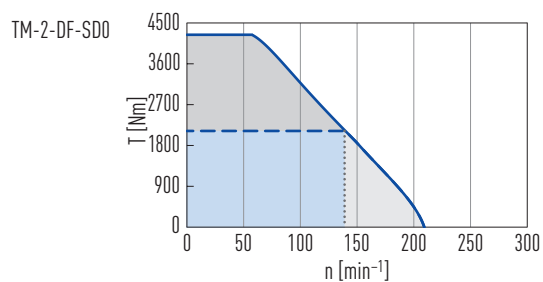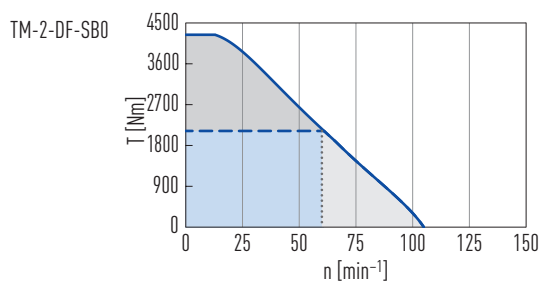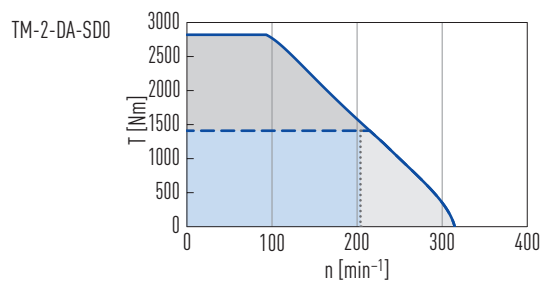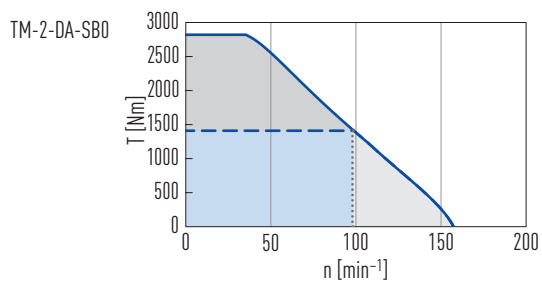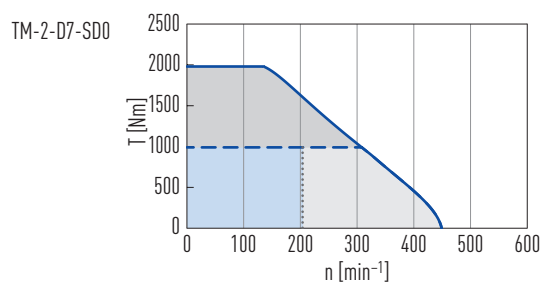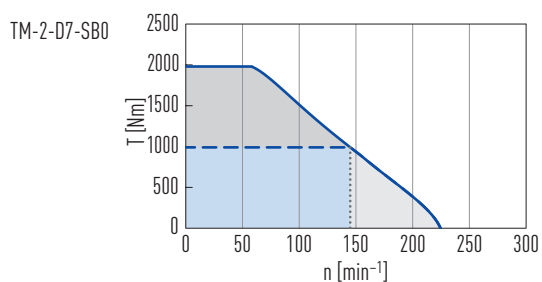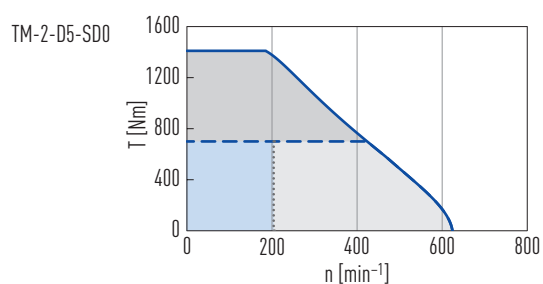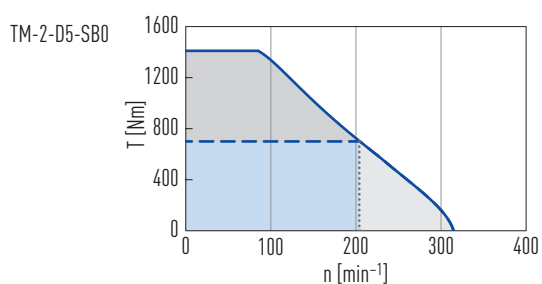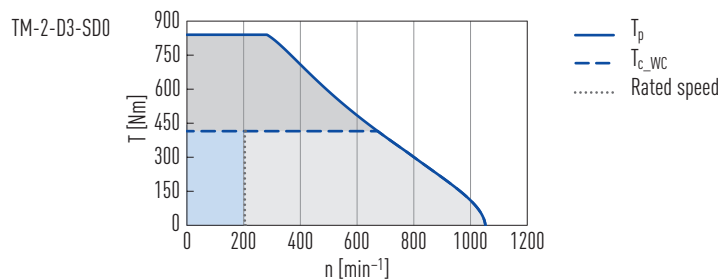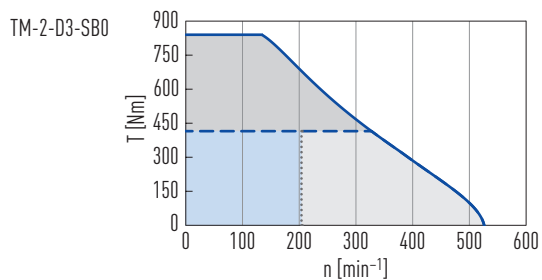

Torque Motors

HIWIN torque motors TM-2

Table 4.6 Technical data for TM-2-D


	Symbol	Unit	TM-2-D3-SB0	TM-2-D3-SD0	TM-2-D5-SB0	TM-2-D5-SD0	TM-2-D7-SB0	TM-2-D7-SD0	TM-2-DA-SB0	TM-2-DA-SD0	TM-2-DF-SB0	TM-2-DF-SD0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	840		1,410		1,980		2,820		4,240	
Continuous torque (WC)	T_{c_WC}	Nm	415		700		990		1,410		2,120	
Stall torque (WC)	T_{s_WC}	Nm	339		572		801		1,146		1,719	
Peak current (for 1 sec.)	I_p	A	106	212	106	212	106	212	106	212	106	212
Continuous current (WC)	I_{c_WC}	A	35.4	70.8	35.4	70.8	35.4	70.8	35.4	70.8	35.4	70.8
Stall current (WC)	I_{s_WC}	A	28.3	56.6	28.3	56.6	28.3	56.6	28.3	56.6	28.3	56.6
Resistance ¹⁾	R_{25}	Ω	1.00	0.24	1.40	0.36	1.90	0.48	2.60	0.65	3.80	0.95
Inductance ¹⁾	L_{25}	mH	6.0	1.5	8.8	2.2	11.7	2.9	16.0	4.0	23.2	5.8
Motor constant	K_m	Nm/ $\sqrt{W}$	9.83	10.04	13.95	13.76	16.78	16.69	20.51	20.51	25.44	25.44
Electrical time constant	K_e	ms	6.0	6.3	6.3	6.1	6.2	6.0	6.2	6.2	6.1	6.1
Torque constant	K_t	Nm/A	12.12	6.06	20.26	10.22	28.41	14.20	40.53	20.26	60.79	30.48
Back emf constant	K_u	$V_{eff}/(rad/s)$	7.0	3.5	11.7	5.9	16.4	8.2	23.4	11.7	35.1	17.6
Inertia of rotor	J	kgm ²	0.16		0.26		0.37		0.53		0.79	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.056	0.058	0.040	0.039	0.029	0.029	0.021	0.021	0.015	0.015
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	327	672	204	423	145	308	98	214	60	139
Max. speed at T_p	n	min ⁻¹	134	282	84	184	57	135	35	93	12	57
Rated speed	n_N	min ⁻¹	204	204	204	204	145	204	98	204	60	139
Mechanical parameters												
Number of poles	2p		88									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	90		110		130		160		210	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M_r	kg	4.8		7.9		11.0		15.8		23.6	
Stator mass	M_s	kg	20		35		50		73		87	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature


WC: with water cooling

¹⁾ Line to line


Dimensions TM-2-D

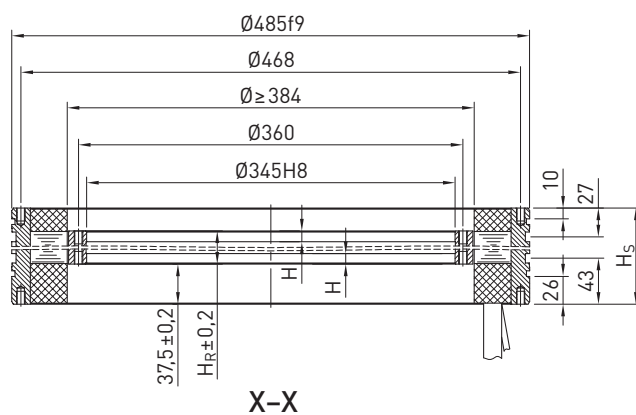

TM-2-D3, TM-2-D5, TM-2-D7

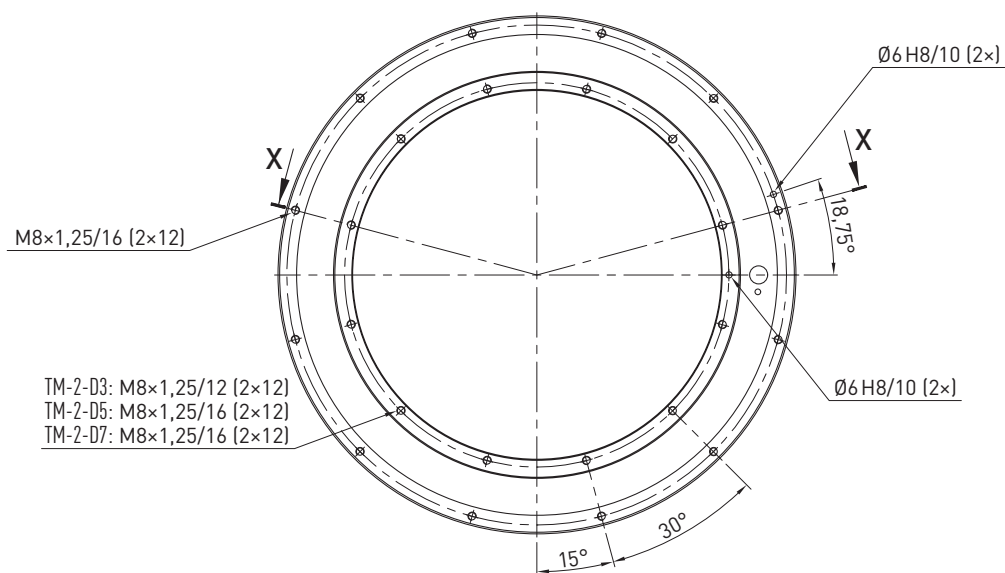

TM-2-DA, TM-2-DF

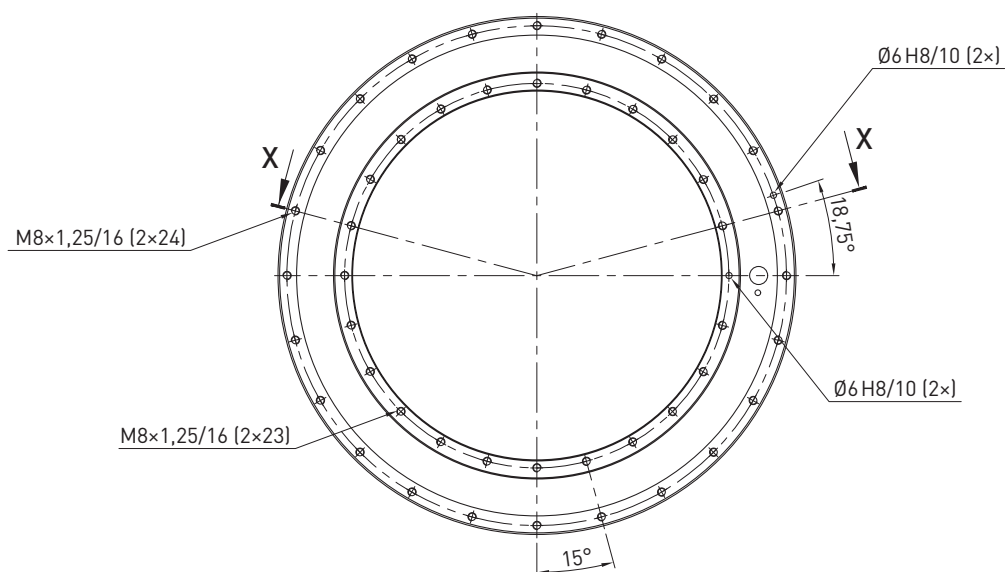

Torque Motors

HIWIN torque motors TM-2

4.4.7 TM-2-G specifications

Torque-speed curves (DC bus voltage: 600 VDC)

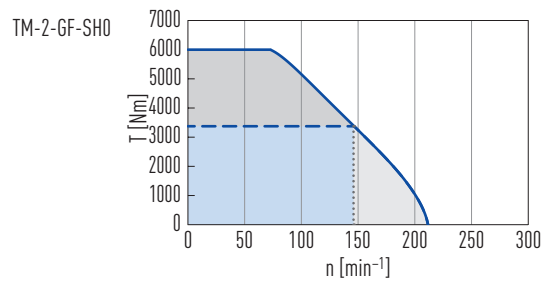
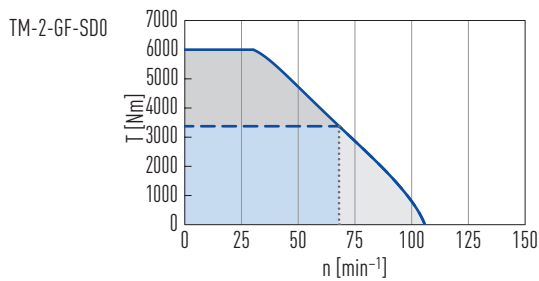
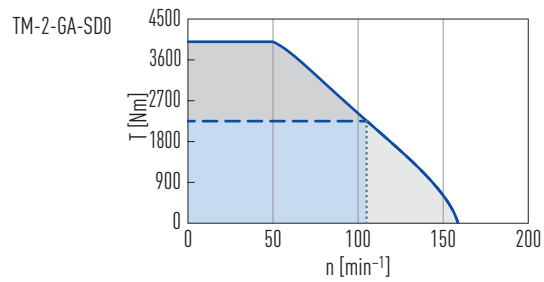
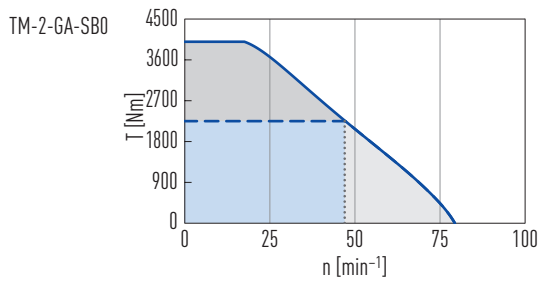
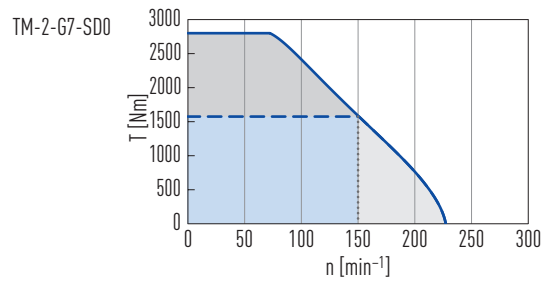
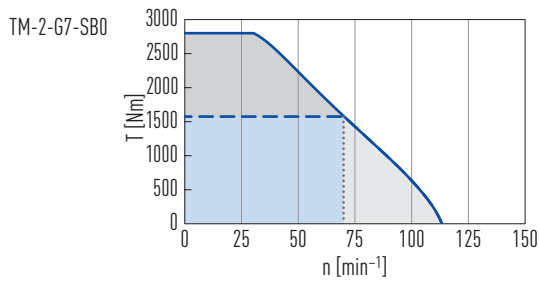
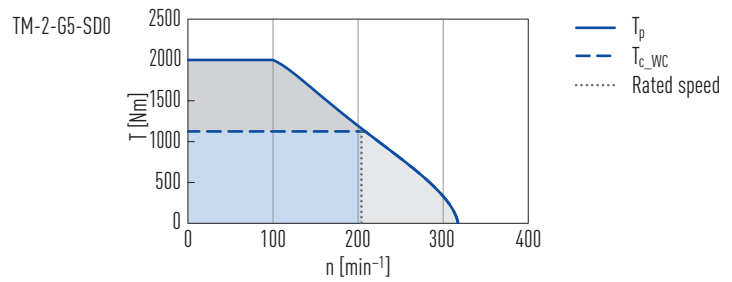
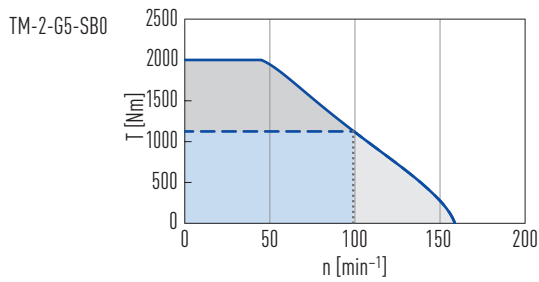


Table 4.7 Technical data for TM-2-G

	Symbol	Unit	TM-2- G5-SB0	TM-2- G5-SD0	TM-2- G7-SB0	TM-2- G7-SD0	TM-2- GA-SB0	TM-2- GA-SD0	TM-2- GF-SD0	TM-2- GF-SH0
Torques and electrical parameters										
Peak torque (for 1 sec.)	T_p	Nm	2,000		2,800		4,000		6,000	
Continuous torque (WC)	T_{c_WC}	Nm	1,125		1,575		2,250		3,375	
Stall torque (WC)	T_{s_WC}	Nm	930	931	1,302	1,304	1,860	1,863	2,794	2,794
Peak current (for 1 sec.)	I_p	A	80	160	80	160	80	160	160	320
Continuous current (WC)	I_{c_WC}	A	30.3	60.6	30.3	60.6	30.3	60.6	60.6	121.2
Stall current (WC)	I_{s_WC}	A	24.2	48.5	24.2	48.5	24.2	48.5	48.5	97.0
Resistance ¹⁾	R_{25}	Ω	2.10	0.52	2.76	0.70	3.76	0.94	1.36	0.34
Inductance ¹⁾	L_{25}	mH	21.00	5.30	27.80	7.00	38.00	9.50	13.70	3.43
Motor constant	K_m	Nm/ $\sqrt{W}$	22.59	22.70	27.65	27.45	33.81	33.81	42.08	42.08
Electrical time constant	K_e	ms	10.0	10.2	10.1	10.0	10.1	10.1	10.1	10.1
Torque constant	K_t	Nm/A	40.18	20.09	56.29	28.06	80.37	40.18	60.28	30.14
Back emf constant	K_u	$V_{eff}/(rad/s)$	23.2	11.6	32.5	16.2	46.4	23.2	34.8	17.4
Inertia of rotor	J	kgm ²	0.452		0.619		0.904		1.380	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.036	0.037	0.028	0.027	0.020	0.020	0.014	0.014
Max. DC bus voltage	U_{max}	VDC	750							
Max. speed at T_{c_WC}	n	min ⁻¹	99	208	70	150	47	105	68	146
Max. speed at T_p	n	min ⁻¹	44	99	30	72	17	49	30	72
Rated speed	n_N	min ⁻¹	99	204	70	150	47	105	68	146
Mechanical parameters										
Number of poles	2p		88							
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000							
Stator height	H_S	mm	110		130		160		210	
Rotor height	H_R	mm	51		71		101		151	
Length of rotor centring fit	H	mm	15		15		15		15	
Rotor mass	M_r	kg	9.7		13.5		19.3		29.0	
Stator mass	M_s	kg	50.0		63.5		78.0		111.8	

 All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

WC: with water cooling

¹⁾ Line to line

Technical drawing of a shaft assembly in cross-section X-X. The shaft has a total length of 565 f9 and a diameter of 548. It features a central section with a diameter of 459 and a length of 435. The shaft is supported by bearings with a diameter of 420 H8. The drawing shows the shaft, bearings, and housing with various dimensions and tolerances.

Technical drawing of a circular flange with the following dimensions and labels:

- Outer diameter: $\geq 230,5$
- Inner diameter: ≤ 51
- Flange thickness: ≤ 65
- Angular dimensions: $18,75^\circ$, 30° , and 15°
- Labels:
 - $M8 \times 1,25/16 [2 \times 24]$
 - $M8 \times 1,25/16 [2 \times 23]$
 - $\emptyset 6 H8/10 [2 \times]$
- Force vectors: X

Technical drawing of a circular flange (Fig. 1) showing dimensions and material specifications. The drawing includes the following details:

- Dimensions:**
 - Outer diameter: $\geq 230,5$
 - Inner diameter: ≤ 51
 - Flange thickness: ≤ 65
 - Angle between center lines: $18,75^\circ$
 - Angle between center lines: 15°
- Material Specifications:**
 - Bolts: $M8 \times 1,25/16$ (2x24)
 - Welds: $M8 \times 1,25/16$ (2x23)
 - Flange: $\emptyset 6 H8/10$ (2x)
- Other Features:**
 - Two cross-section lines labeled 'X' are shown.
 - The drawing is a top view with dashed lines indicating the center and symmetry.

5. HIWIN torque motors IM-2

5.1 Special characteristics of the torque motors IM-2

IM-2 series torque motors are ready-to-install motor elements consisting of a stator and rotor, especially suitable for applications in machine tools.

Due to the integrated cooling channels, the torque motor can be operated with liquid cooling. No additional process heat is then introduced into the machine and higher continuous torques can be achieved.

The torque motors of the IM-2 series are constructed for field-weakening operation. They thus achieve a significantly broader speed spectrum and are therefore predestined for combined axes for turning and milling operations.



Key features of the torque motors IM-2:

- Optimised for a broad speed spectrum (field weakening operation)
- Wear- and maintenance-free direct drive
- Play-free and highly precise
- Prepared for liquid cooling
- UL-certified

Typical fields of application for the torque motors TMRI:

- Machine tools, especially combined turning and milling axes


5.2 Order code for torque motors IM-2

	IM-2	D	7	PA0	0	10	V	00	
Series:									Special equipment:
IM-2									00: Rotor and stator separately (standard)
Outer diameter [mm]:									03: Rotor and stator mounted with installation clamp
2: 198									Cable outlet orientation:
4: 230									S: Motor cables potted in the stator (standard)
7: 310									V: Type S with additional strain relief plate
A: 385									A: Type V with additional PG screw connections
G: 565									H: Type V with 90° cable outlet
Rotor height [mm]:									Cable length:
3: 30									05: 500
5: 50									10: 1,000
7: 70									20: 2,000 (standard)
A: 100									Thermal sensors:
F: 150									0: 3 × PTC100, 3 × PTC130, 1 × PT1000 (Standard)
Winding variant									1: 3 × PTC100, 3 × PTC130, 3 × PT1000

Torque Motors

HIWIN torque motors IM-2

5.3 IM-2 torques










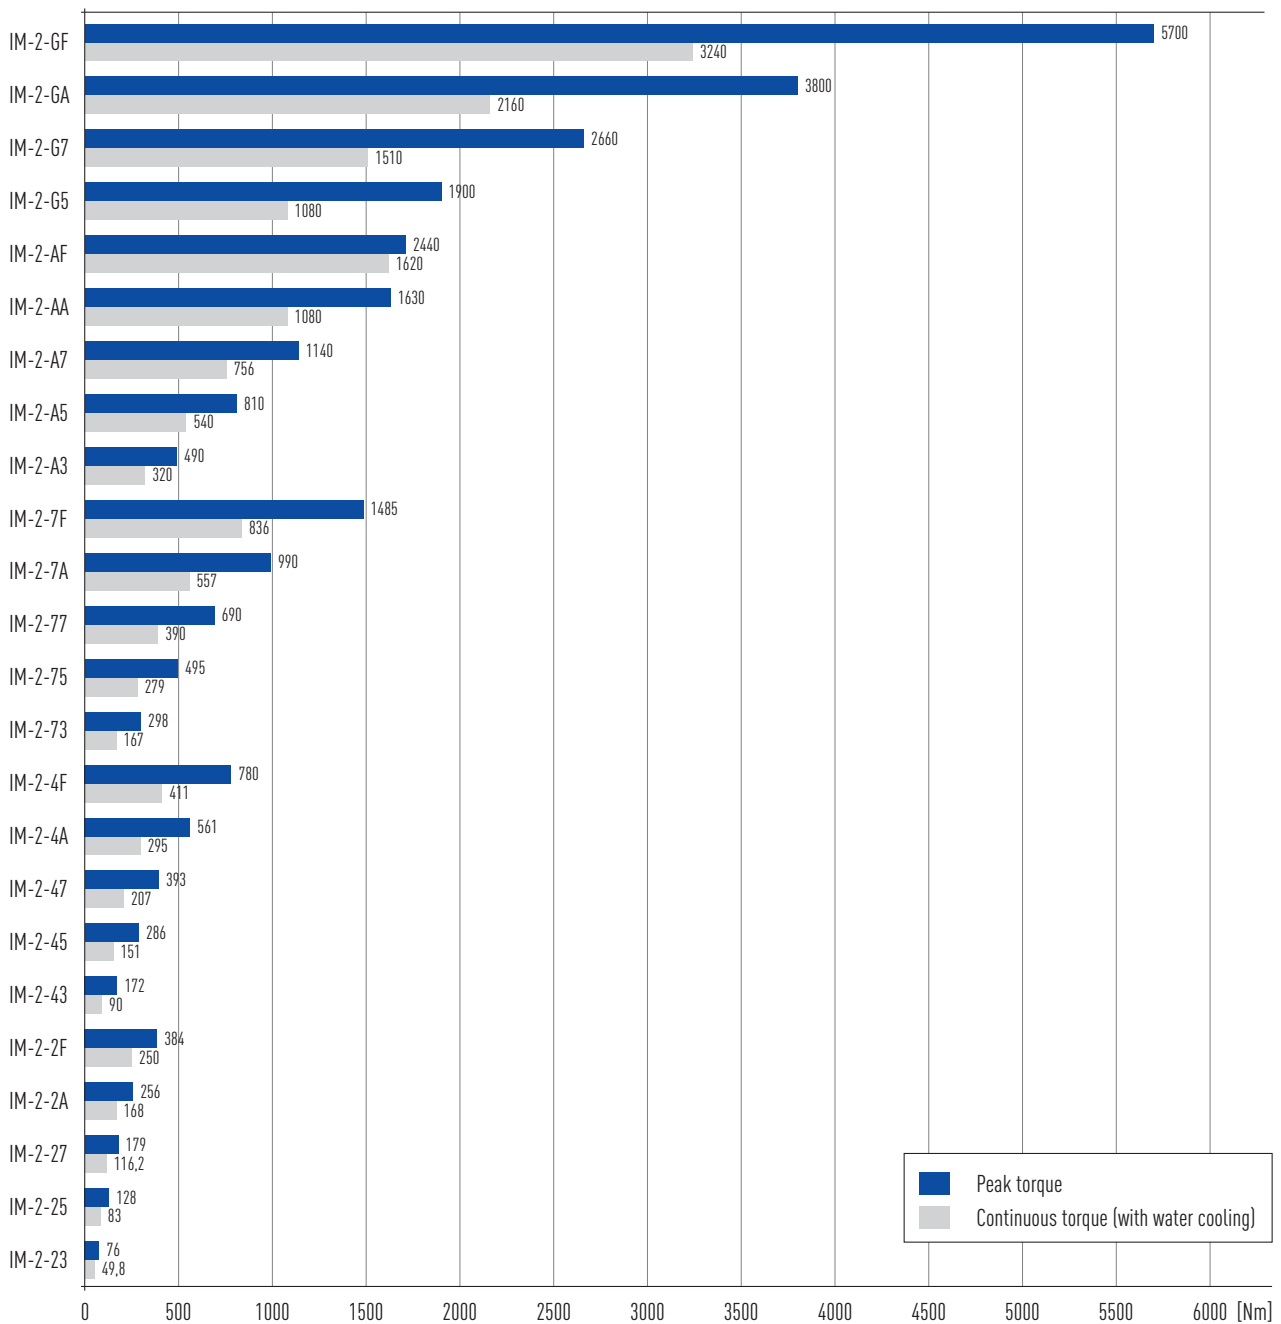


5.4 Torque motor IM-2 specifications

5.4.1 IM-2-2 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

- T_p
- T_{c_wc}
- T_{c_fw} (T_{c_wc} in field weakening mode)
- Power at T_{c_wc}
- Rated speed in field weakening mode

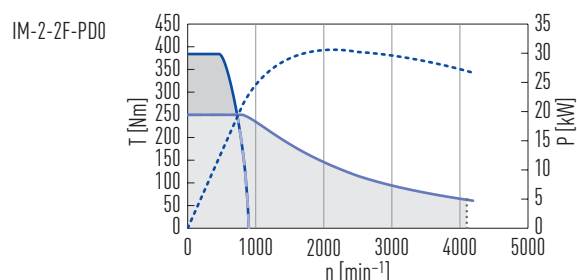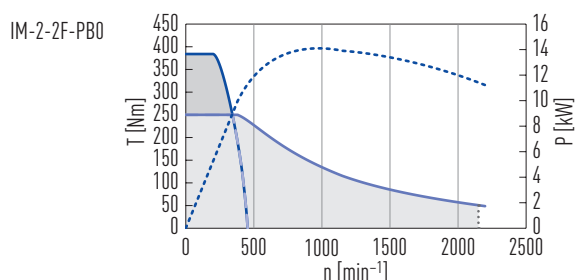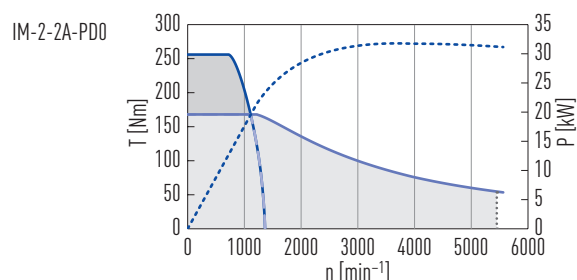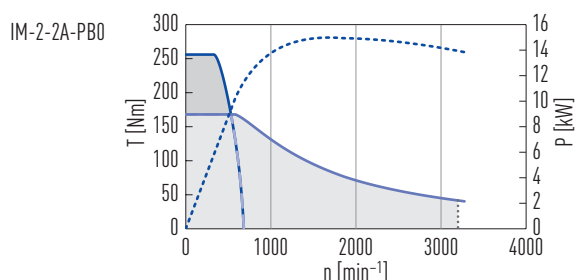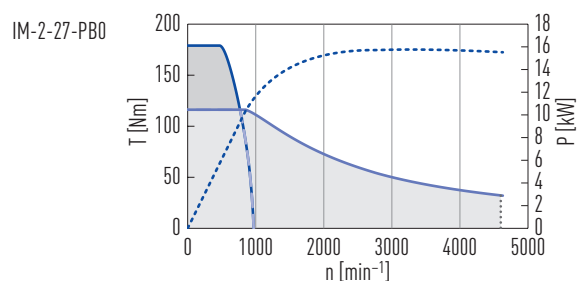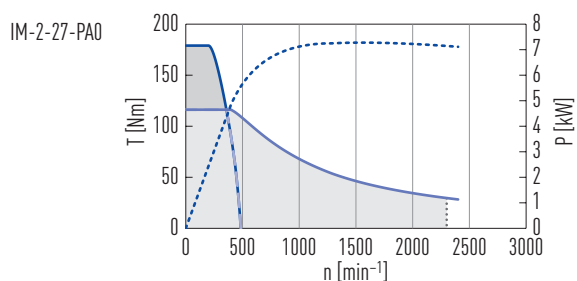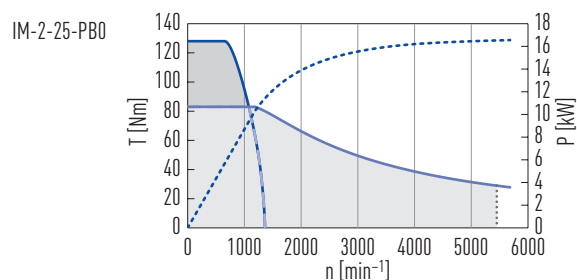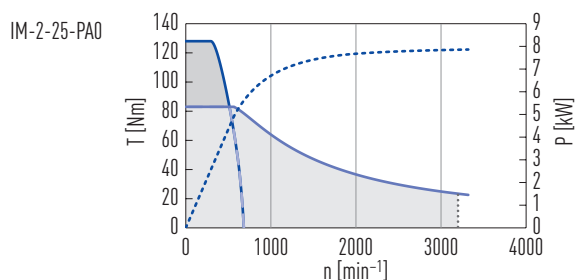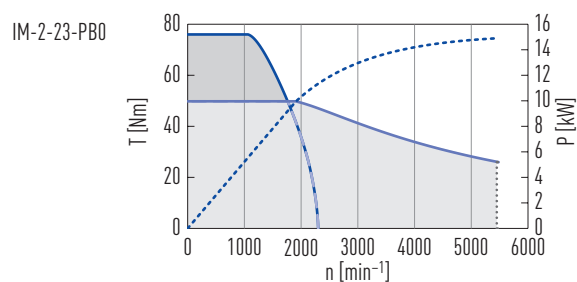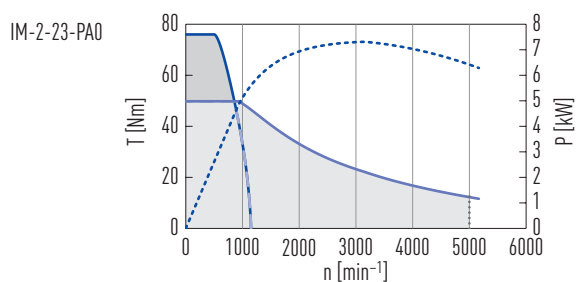

Torque Motors

HIWIN torque motors IM-2

Table 5.1 Technical data for IM-2-2


	Symbol	Unit	IM-2-23-PA0	IM-2-23-PB0	IM-2-25-PA0	IM-2-25-PB0	IM-2-27-PA0	IM-2-27-PB0	IM-2-2A-PB0	IM-2-2A-PD0	IM-2-2F-PB0	IM-2-2F-PD0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	76		128		179		256		384	
Continuous torque (WC)	T_{c_WC}	Nm	49.8		83.0		116.2		168.0		250.0	
Stall torque (WC)	T_{s_WC}	Nm	42	42	70	70	98	98	141	141	210	210
Peak current (for 1 sec.)	I_p	A	25.5	51.0	25.5	51.0	25.5	51.0	51.0	102	51.0	102.0
Continuous current (WC)	I_{c_WC}	A	10.2	20.4	10.2	20.4	10.2	20.4	20.4	40.8	20.4	40.8
Stall current (WC)	I_{s_WC}	A	8.2	16.3	8.2	16.3	8.2	16.3	16.3	32.6	16.3	32.6
Resistance ¹⁾	R_{25}	Ω	3.50	0.90	5.20	1.30	6.90	1.70	2.40	0.60	3.40	0.85
Inductance ¹⁾	L_{25}	mH	25.5	6.4	37.6	9.4	49.7	12.4	17.0	4.3	24.6	6.2
Motor constant	K_m	Nm/ $\sqrt{W}$	2.41	2.38	3.35	3.35	4.09	4.12	4.92	4.92	6.21	6.21
Electrical time constant	K_e	ms	7.3	7.1	7.2	7.2	7.2	7.3	7.1	7.2	7.2	7.3
Torque constant	K_t	Nm/A	5.54	2.77	9.35	4.68	13.16	6.58	9.35	4.68	14.03	7.10
Back emf constant	K_u	$V_{eff}/(rad/s)$	3.2	1.6	5.4	2.7	7.6	3.8	5.4	2.7	8.1	4.1
Inertia of rotor	J	kgm ²	0.0051		0.0079		0.0107		0.0146		0.0215	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.192	0.187	0.129	0.129	0.098	0.099	0.070	0.070	0.049	0.049
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	856	1,763	513	1,078	358	769	531	1,110	342	726
Max. speed at T_p	n	min ⁻¹	477	1,004	289	641	196	462	313	686	193	449
Rated speed	n_N	min ⁻¹	5,000	5,450	3,200	5,450	2,300	4,600	3,200	5,450	2,150	4,100
Mechanical parameters												
Number of poles	2p		22									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	80		100		120		150		200	
Rotor height	H_R	mm	51		71		91		121		171	
Length of rotor centring fit	H	mm	15		20		20		20		20	
Rotor mass	M_r	kg	2.74		4.09		5.43		7.43		10.79	
Stator mass	M_s	kg	6.5		9.0		11.2		15.0		22.2	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature


WC: with water cooling

¹⁾ Line to line


Dimensions IM-2-2

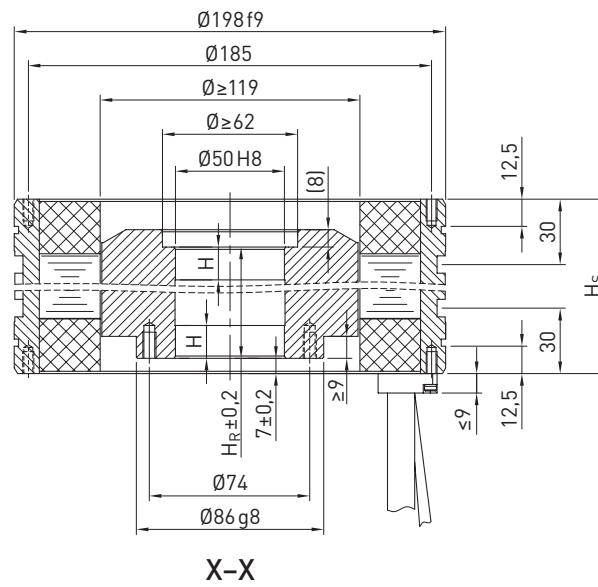

IM-2-23, IM-2-25, IM-2-27

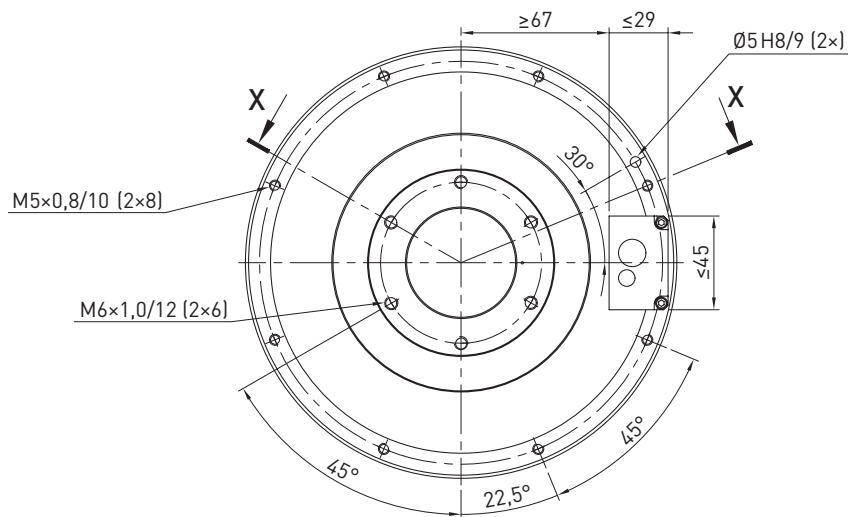

IM-2-2A, IM-2-2F

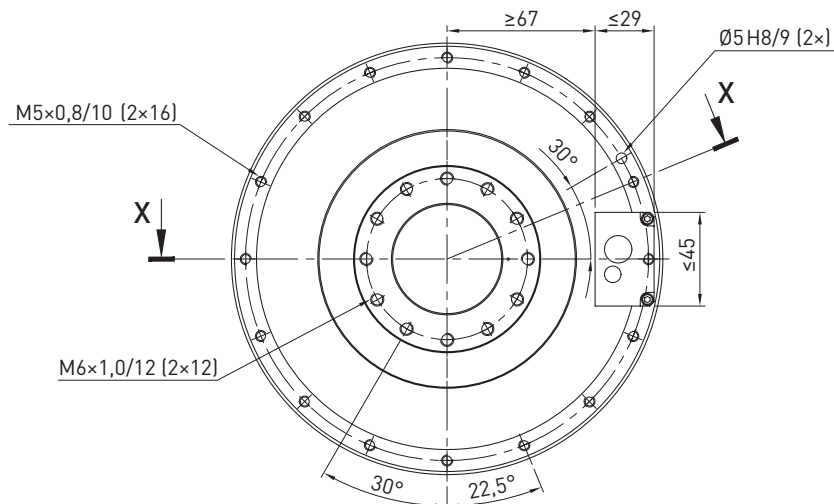

Torque Motors

HIWIN torque motors IM-2

5.4.2 IM-2-4 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

- T_p
- - - T_{c_wc}
- T_{c_fw} (T_{c_wc} in field weakening mode)
- ... Power at T_{c_wc}
- Rated speed in field weakening mode

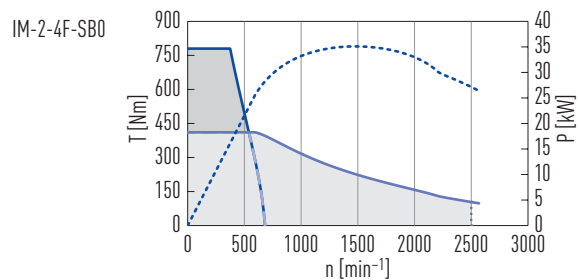
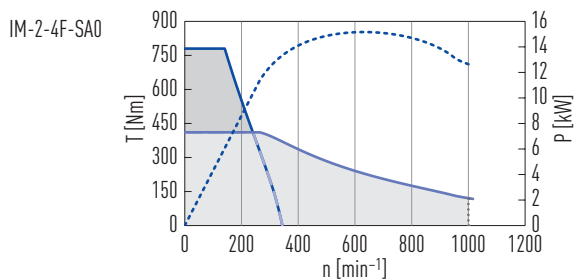
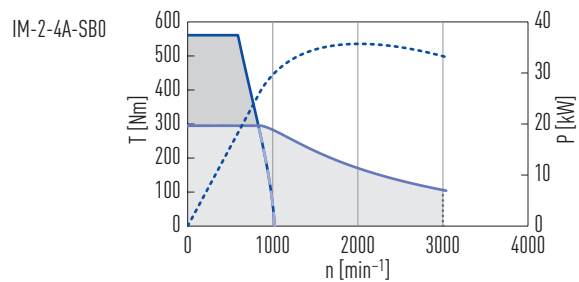
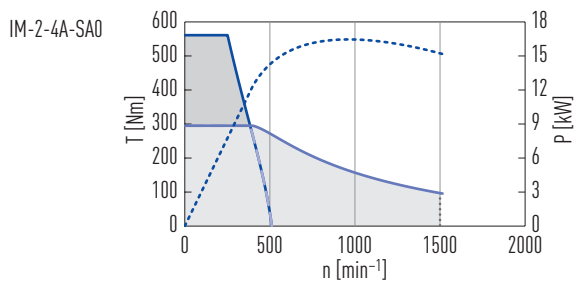
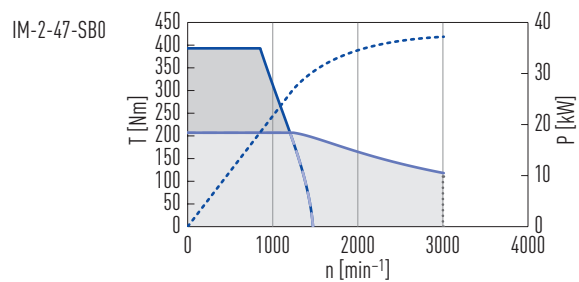
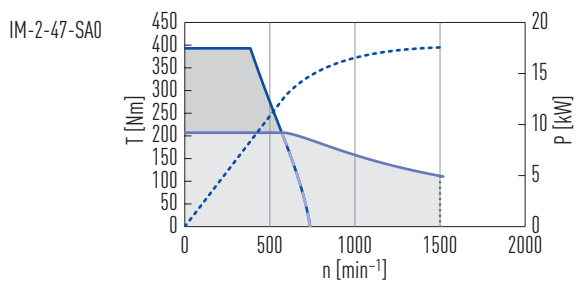
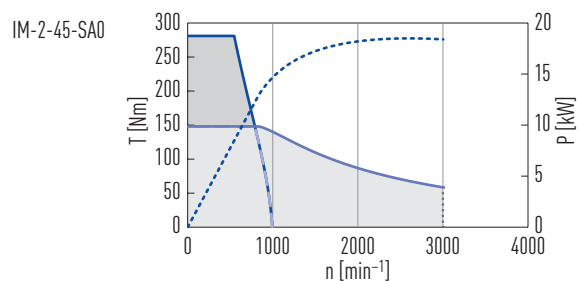
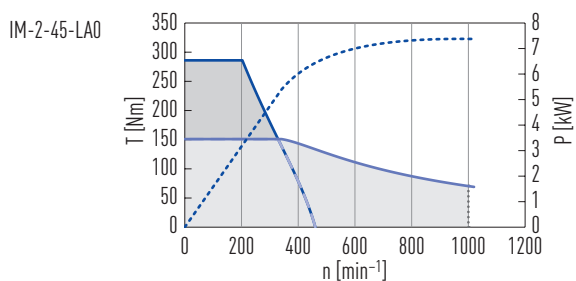
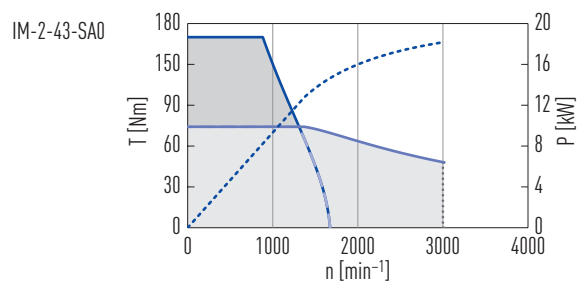
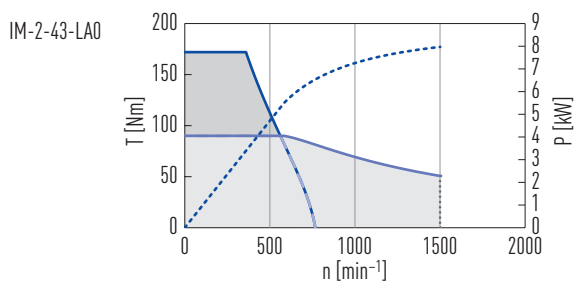


Table 5.2 Technical data for IM-2-4

	Symbol	Unit	IM-2-43-LA0	IM-2-43-SA0	IM-2-45-LA0	IM-2-45-SA0	IM-2-47-SA0	IM-2-47-SB0	IM-2-4A-SA0	IM-2-4A-SB0	IM-2-4F-SA0	IM-2-4F-SB0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	172	168	286	281	393	393	561	561	780	780
Continuous torque (WC)	T_{c_WC}	Nm	90	89	151	148	207	207	295	295	411	411
Stall torque (WC)	T_{s_WC}	Nm	73	72	122	120	168	168	239	239	336	336
Peak current (for 1 sec.)	I_p	A	23.7	52.0	23.7	52.0	52.0	104.0	52.0	104.0	52.0	104.0
Continuous current (WC)	I_{c_WC}	A	11.4	24.9	11.4	24.9	24.9	49.8	24.9	49.8	24.9	49.8
Stall current (WC)	I_{s_WC}	A	9.1	19.9	9.1	19.9	19.9	39.8	19.9	39.8	19.9	39.8
Resistance ¹⁾	R_{25}	Ω	5.6	1.2	8.3	1.72	2.3	0.6	3.1	0.8	4.5	1.1
Inductance ¹⁾	L_{25}	mH	16.8	3.5	23.8	5.1	6.8	1.7	9.3	2.3	13.4	3.4
Motor constant	K_m	Nm/ $\sqrt{W}$	2.86	2.84	3.89	3.93	4.60	4.51	5.74	5.65	7.09	7.17
Electrical time constant	K_e	ms	3.0	2.9	2.9	3.0	3.0	2.8	3.0	2.9	3.0	3.1
Torque constant	K_t	Nm/A	8.31	3.81	13.86	6.41	8.66	4.33	12.47	6.24	18.53	9.35
Back emf constant	K_u	$V_{eff}/(rad/s)$	4.8	2.2	8.0	3.7	5.0	2.5	7.2	3.6	10.7	5.4
Inertia of rotor	J	kgm ²	0.018		0.027		0.036		0.049		0.071	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.096	0.094	0.065	0.066	0.049	0.047	0.036	0.035	0.025	0.026
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	561	1,310	328	790	570	1,203	384	831	240	539
Max. speed at T_p	n	min ⁻¹	359	883	203	546	385	852	251	590	140	374
Rated speed	n_N	min ⁻¹	1,500	3,000	1,000	3,000	1,500	3,000	1,500	3,000	1,000	2,500
Mechanical parameters												
Number of poles	2p		40									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	70		90		110		140		190	
Rotor height	H_R	mm	58		78		98		128		178	
Length of rotor centring fit	H	mm	17		17		17		17		17	
Rotor mass	M_r	kg	3.7		5.4		7.2		9.6		13.9	
Stator mass	M_s	kg	6.5		9.0		11.2		15.0		22.2	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature


WC: with water cooling

¹⁾ Line to line


Torque Motors

HIWIN torque motors IM-2


Dimensions IM-2-4

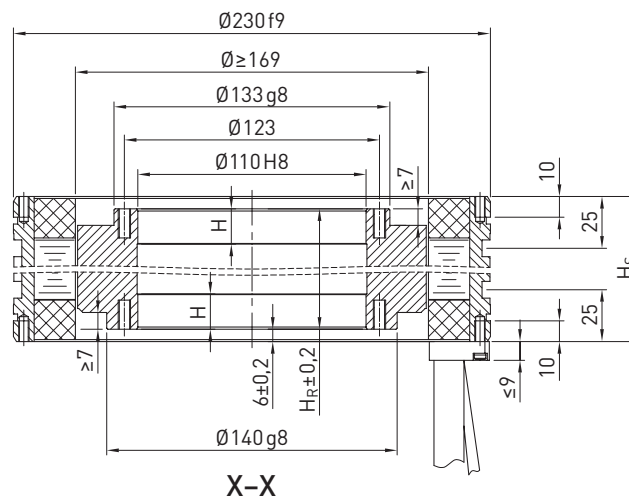

IM-2-43, IM-2-45, IM-2-47

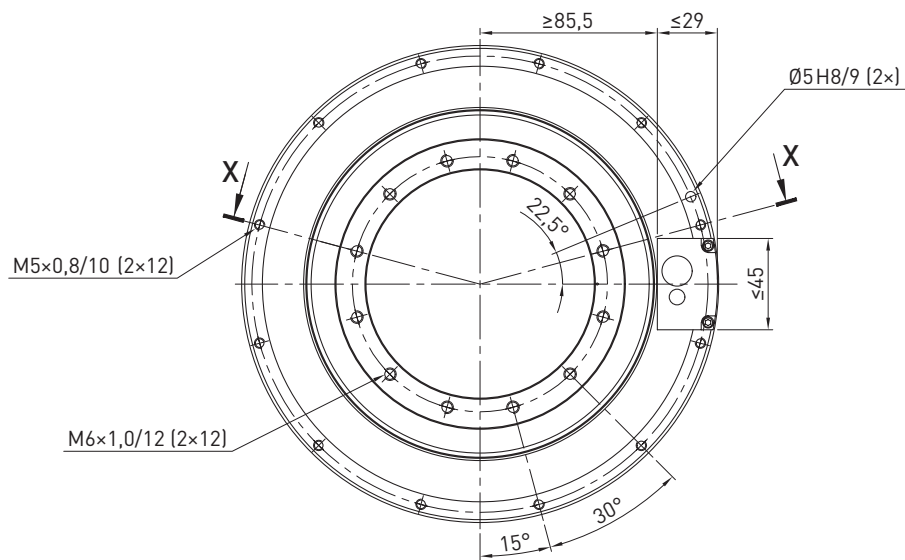











IM-2-4A, IM-2-4F

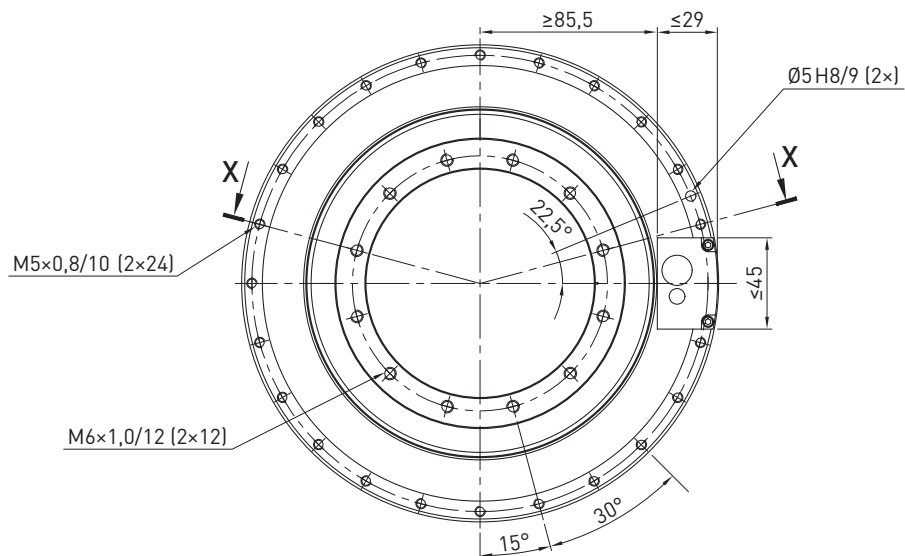

5.4.3 IM-2-7 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

- T_p
- - - T_{c_wc}
- T_{c_fw} (T_{c_wc} in field weakening mode)
- · - · - Power at T_{c_wc}
- Rated speed in field weakening mode

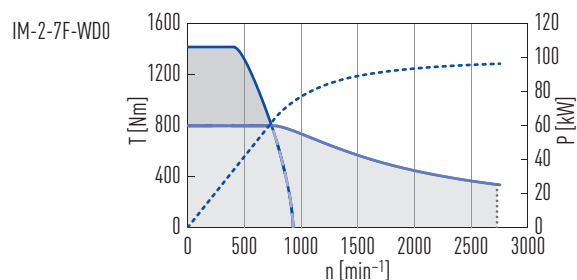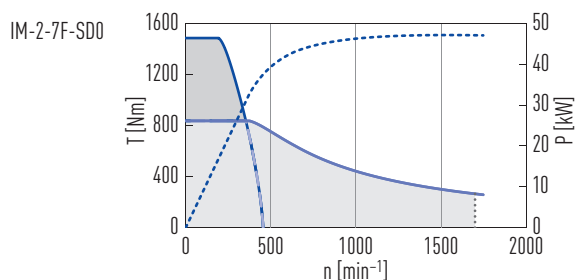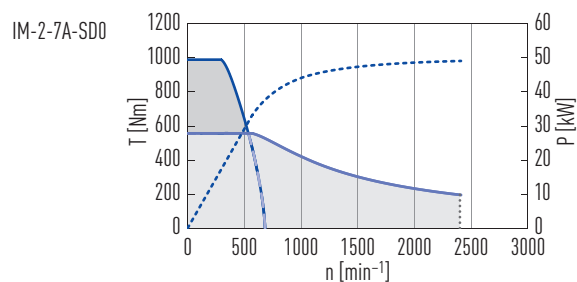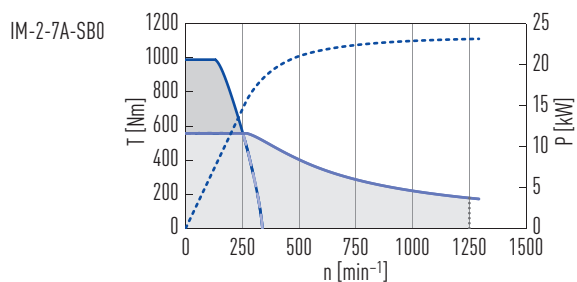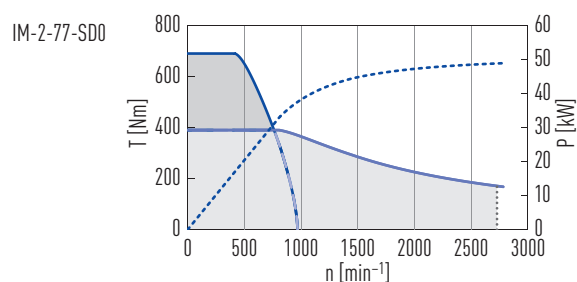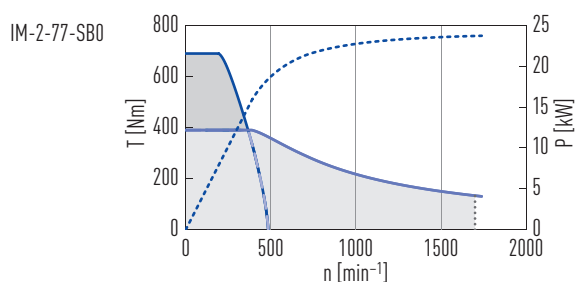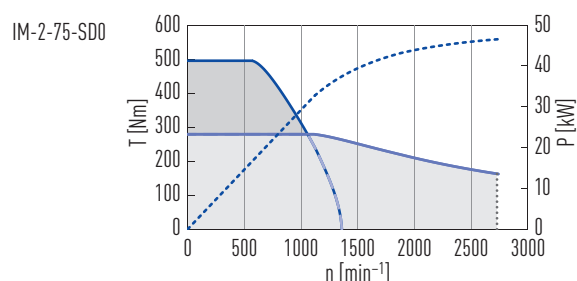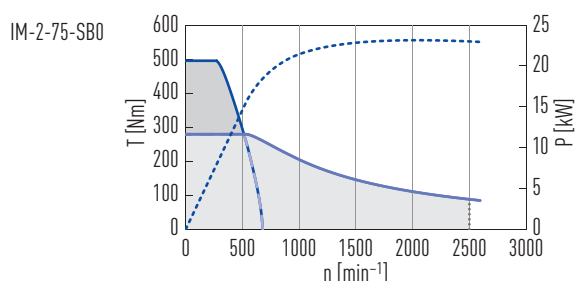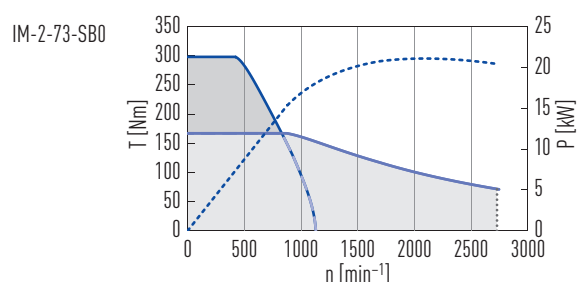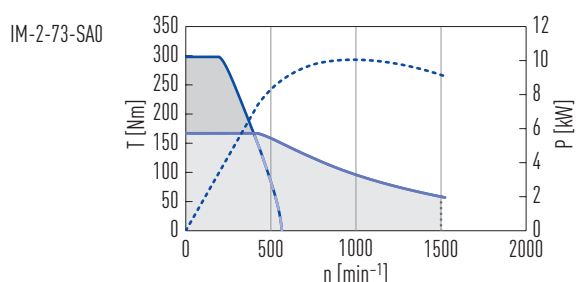

Torque Motors

HIWIN torque motors IM-2

Table 5.3 Technical data for IM-2-7


	Symbol	Unit	IM-2-73-SA0	IM-2-73-SB0	IM-2-75-SB0	IM-2-75-SD0	IM-2-77-SB0	IM-2-77-SD0	IM-2-7A-SB0	IM-2-7A-SD0	IM-2-7F-SD0	IM-2-7F-WD0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	298		495		690		990		1,485	1,415
Continuous torque (WC)	T_{c_WC}	Nm	167		279		390		557		836	797
Stall torque (WC)	T_{s_WC}	Nm	138	137	229	229	321	321	458	458	688	656
Peak current (for 1 sec.)	I_p	A	44.2	88.3	88.3	176.6	88.3	176.6	88.3	176.6	176.6	344.0
Continuous current (WC)	I_{c_WC}	A	16.2	32.3	32.3	64.5	32.3	64.5	32.3	64.5	64.5	125.7
Stall current (WC)	I_{s_WC}	A	13.0	25.8	25.8	51.6	25.8	51.6	25.8	51.6	51.6	100.6
Resistance ¹⁾	R_{25}	Ω	2.70	0.68	1.00	0.25	1.32	0.33	1.80	0.45	0.65	0.17
Inductance ¹⁾	L_{25}	mH	18.10	4.52	6.65	1.66	8.80	2.20	12.00	3.00	4.30	1.13
Motor constant	K_m	Nm/ $\sqrt{W}$	5.28	5.31	7.25	7.25	8.87	8.87	10.86	10.86	13.53	12.97
Electrical time constant	K_e	ms	6.7	6.6	6.7	6.6	6.7	6.7	6.7	6.7	6.6	6.6
Torque constant	K_t	Nm/A	11.29	5.65	9.41	4.69	13.16	6.58	18.88	9.35	14.03	6.86
Back emf constant	K_u	$V_{eff}/(rad/s)$	6.52	3.26	5.43	2.71	7.60	3.80	10.90	5.40	8.10	3.96
Inertia of rotor	J	kgm ²	0.071		0.104		0.138		0.187		0.271	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.099	0.099	0.067	0.067	0.051	0.051	0.037	0.037	0.026	0.026
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	399	829	512	1,057	366	761	251	535	353	740
Max. speed at T_p	n	min ⁻¹	195	420	268	567	192	416	129	293	192	411
Rated speed	n_N	min ⁻¹	1,500	2,730	2,500	2,730	1,700	2,730	1,250	2,400	1,700	2,730
Mechanical parameters												
Number of poles	2p		44									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	80		100		120		150		200	
Rotor height	H_R	mm	51		71		91		121		171	
Length of rotor centring fit	H	mm	15		20		20		20		20	
Rotor mass	M_r	kg	8.2		11.8		15.5		21.0		30.2	
Stator mass	M_s	kg	13.6		17.9		22.3		28.9		40.6	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

WC: with water cooling


¹⁾ Line to line

Dimensions IM-2-7

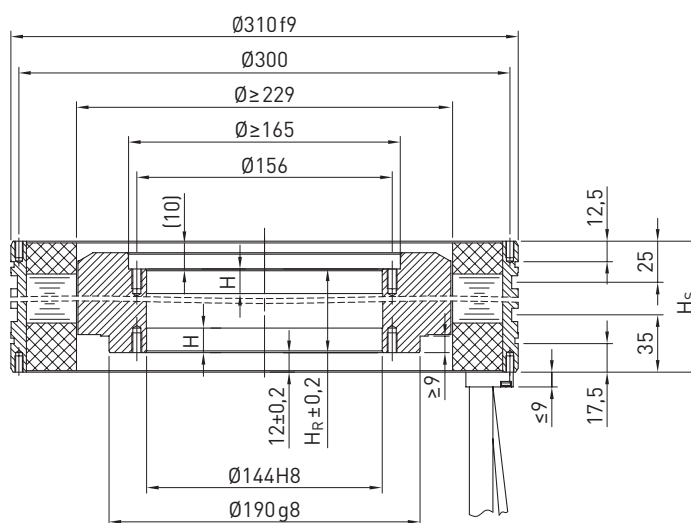


X-X

IM-2-73, IM-2-75, IM-2-77

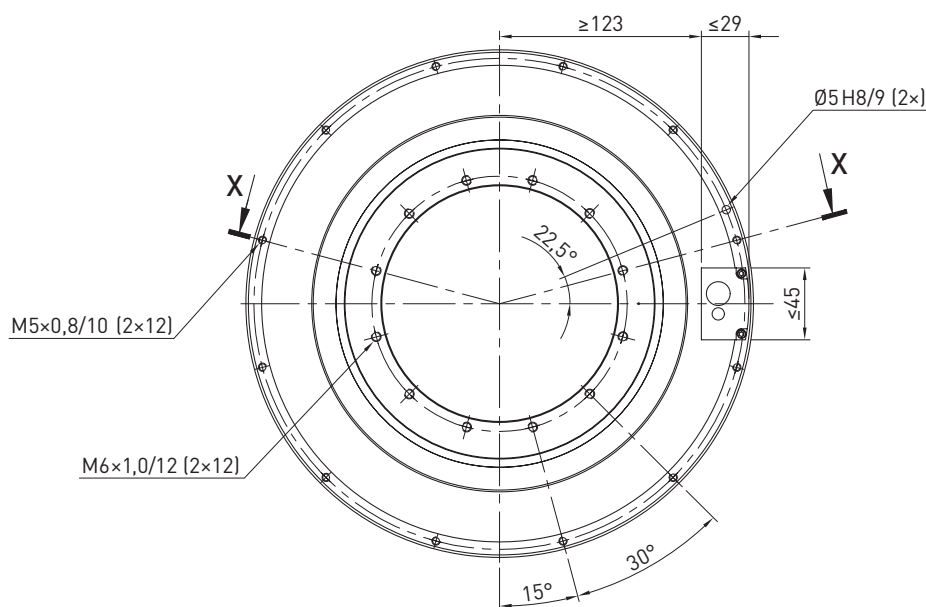

IM-2-7A, IM-2-7F

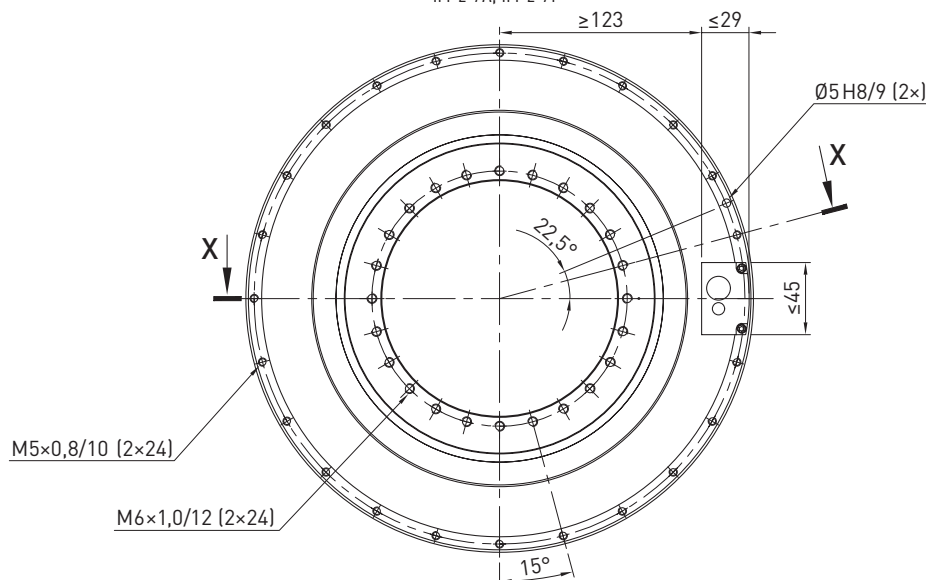

Torque Motors

HIWIN torque motors IM-2

5.4.4 IM-2-A specifications

Torque-speed curves (DC bus voltage: 600 VDC)

- T_p
- - T_{c_wc}
- T_{c_fw} (T_{c_wc} in field weakening mode)
- ... Power at T_{c_wc}
- Rated speed in field weakening mode

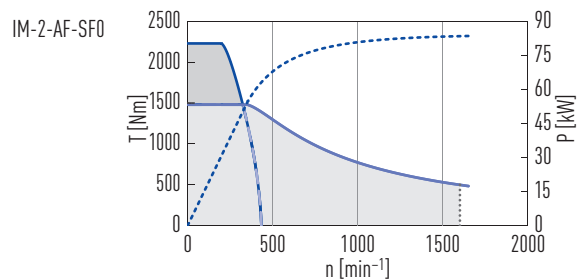
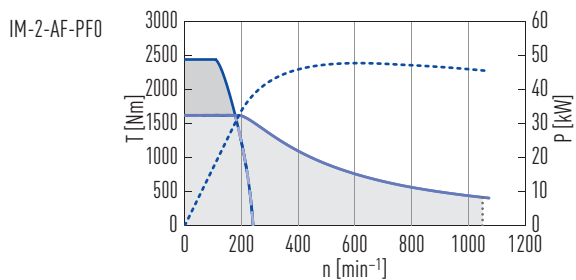
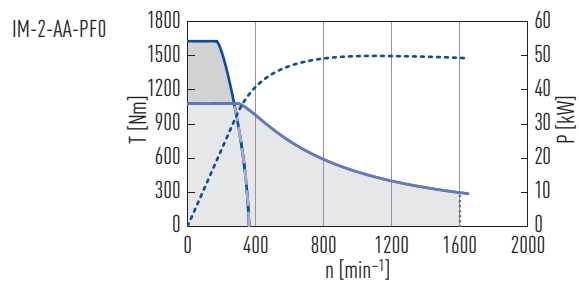
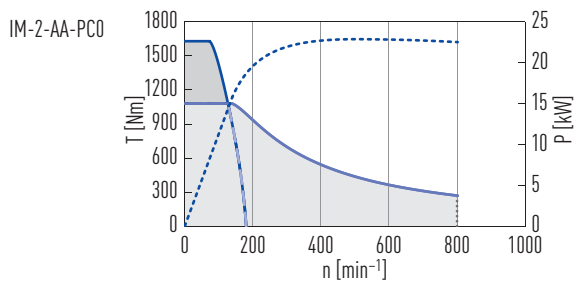
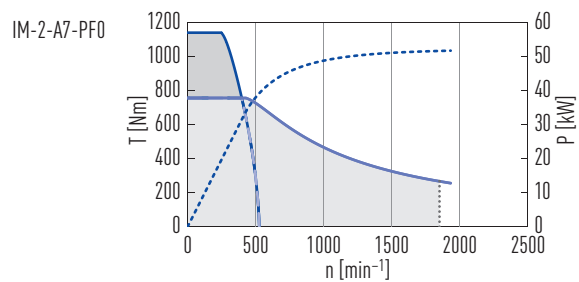
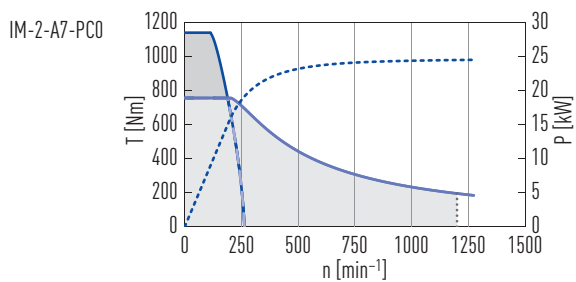
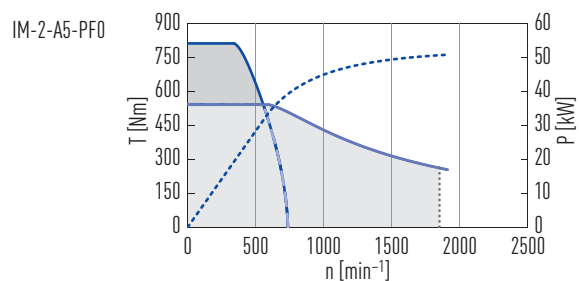
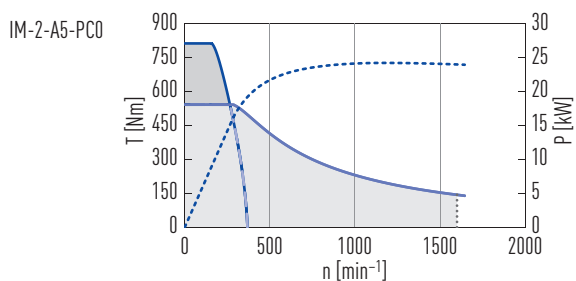
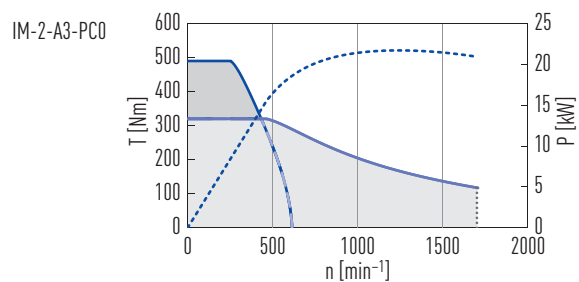
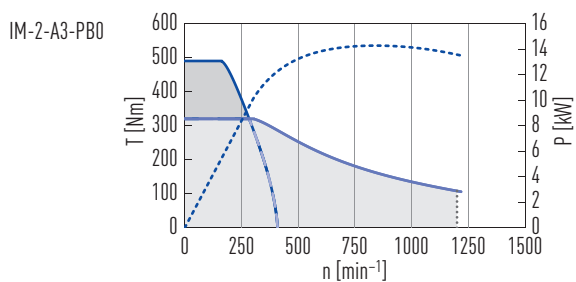


Table 5.4 Technical data for IM-2-A



	Symbol	Unit	IM-2-A3-PB0	IM-2-A3-PC0	IM-2-A5-PC0	IM-2-A5-PF0	IM-2-A7-PC0	IM-2-A7-PF0	IM-2-AA-PC0	IM-2-AA-PF0	IM-2-AF-PF0	IM-2-AF-PF0
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	490		810		1,140		1,630		2,440	2,230
Continuous torque (WC)	T_{c_WC}	Nm	320		540		756		1,080		1,620	1,480
Stall torque (WC)	T_{s_WC}	Nm	268	268	453	453	634	634	907	907	1,361	1,242
Peak current (for 1 sec.)	I_p	A	52	78	78	156	78	156	78	156	156	255
Continuous current (WC)	I_{c_WC}	A	23.0	35.0	35.0	70.0	35.0	70.0	35.0	70.0	70.0	114.4
Stall current (WC)	I_{s_WC}	A	18.4	28.0	28.0	56.0	28.0	56.0	28.0	56.0	56.0	91.5
Resistance ¹⁾	R_{25}	Ω	1.80	0.82	1.20	0.30	1.60	0.40	2.20	0.55	0.80	0.30
Inductance ¹⁾	L_{25}	mH	12.4	5.5	8.2	2.0	10.8	2.7	14.8	3.7	5.4	2.0
Motor constant	K_m	Nm/ $\sqrt{W}$	9.43	9.32	12.86	12.86	15.65	15.65	19.40	19.40	24.19	21.94
Electrical time constant	K_e	ms	6.9	6.7	6.8	6.7	6.8	6.8	6.7	6.7	6.8	6.7
Torque constant	K_t	Nm/A	15.59	10.39	17.32	8.66	24.25	12.12	35.33	17.67	26.50	14.72
Back emf constant	K_u	$V_{eff}/(rad/s)$	9.0	6.0	10.0	5.0	14.0	7.0	20.4	10.2	15.3	8.5
Inertia of rotor	J	kgm ²	0.185		0.270		0.355		0.482		0.694	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.074	0.070	0.048	0.048	0.036	0.036	0.026	0.026	0.018	0.018
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	283	432	265	555	188	397	126	273	177	324
Max. speed at T_p	n	min ⁻¹	161	252	158	342	112	245	73	170	108	199
Rated speed	n_N	min ⁻¹	1,200	1,700	1,600	1,850	1,200	1,850	800	1,600	1,050	1,600
Mechanical parameters												
Number of poles	2p		66									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H_S	mm	90		110		130		160		210	
Rotor height	H_R	mm	51		71		91		121		171	
Length of rotor centring fit	H	mm	15		20		20		20		20	
Rotor mass	M_r	kg	11.3		16.3		21.3		28.7		41.2	
Stator mass	M_s	kg	20.1		26.8		34.5		44.9		63.1	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

WC: with water cooling

¹⁾ Line to line

Technical drawing of a shaft-hub assembly in cross-section X-X. The shaft has a diameter of $\varnothing 385f9$. The hub has an outer diameter of $\varnothing 370$ and an inner bore of $\varnothing 299$. The shaft is mounted on a base with a diameter of $\varnothing 216H8$ and a hole of $\varnothing 264g8$. The shaft has a length of 12 ± 0.2 . The hub has a length of 31.5 . The shaft is secured with a nut and washer. The drawing shows the shaft, hub, and base with their respective dimensions and tolerances.

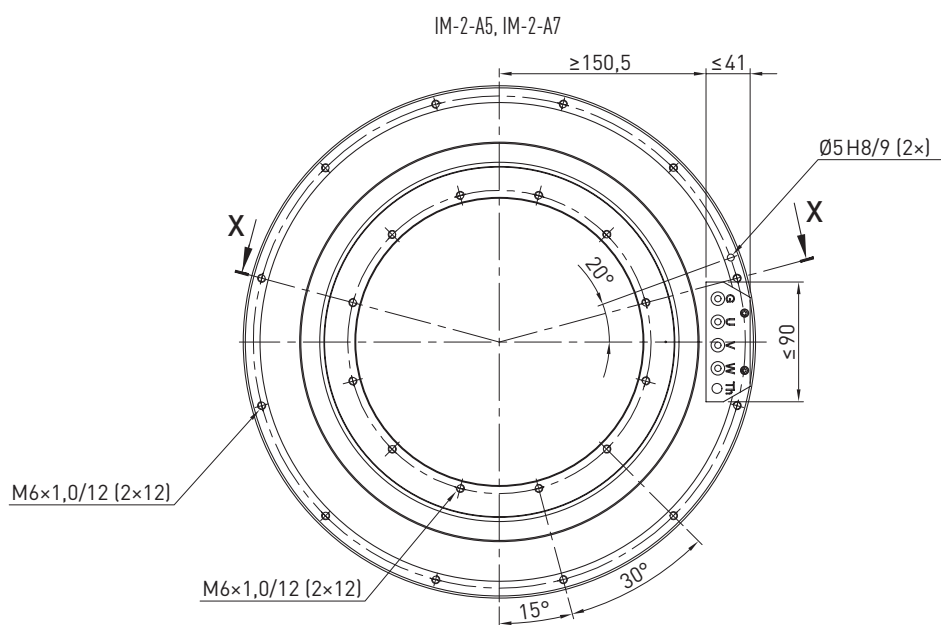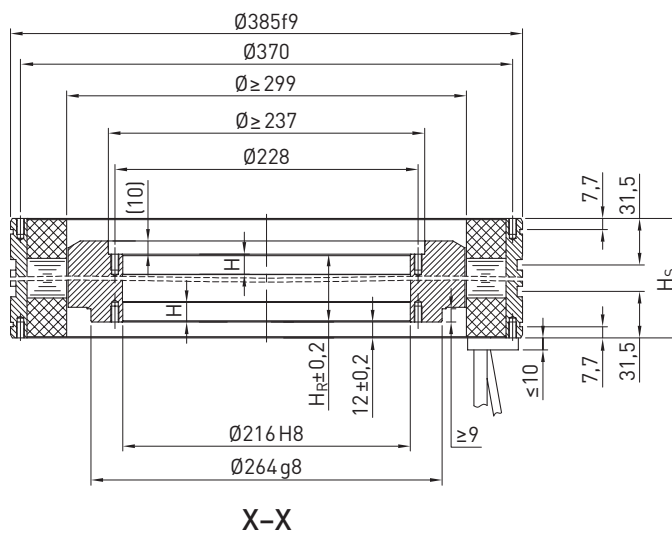

Torque Motors

HIWIN torque motors IM-2

5.4.5 IM-2-G specifications

Torque-speed curves (DC bus voltage: 600 VDC)

- T_p
- - T_{c_wc}
- T_{c_fw} (T_{c_wc} in field weakening mode)
- ... Power at T_{c_wc}
- Rated speed in field weakening mode

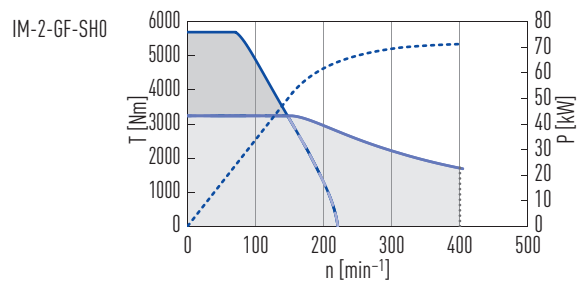
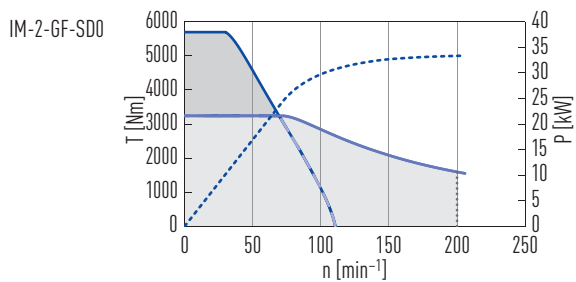
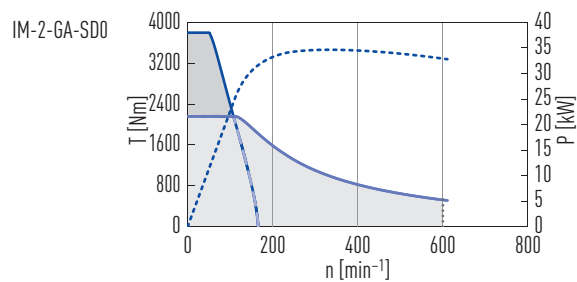
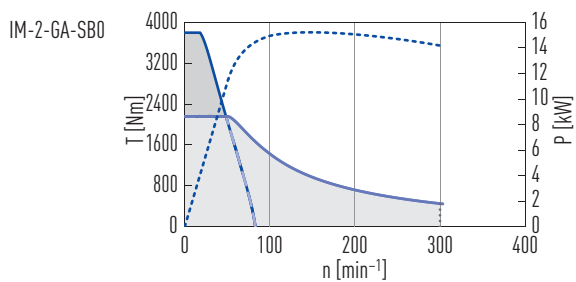
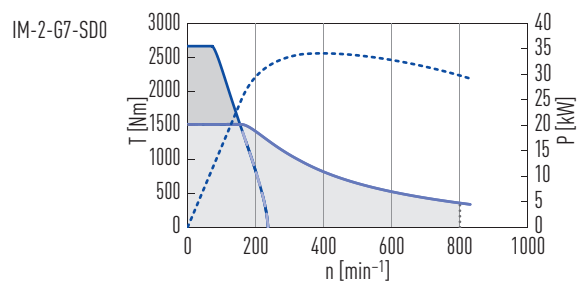
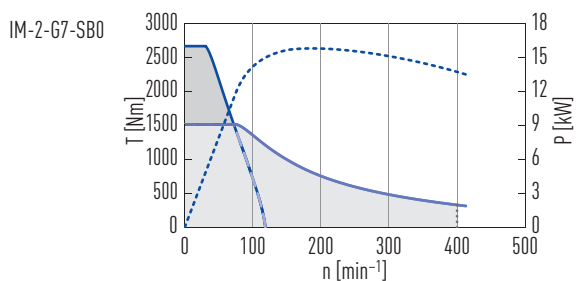
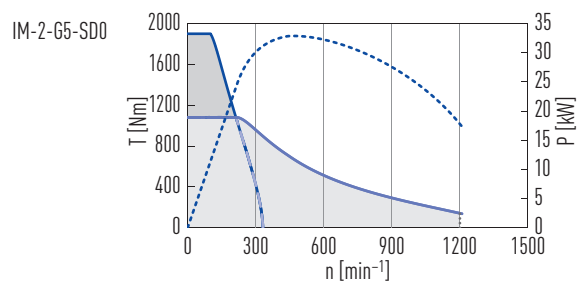
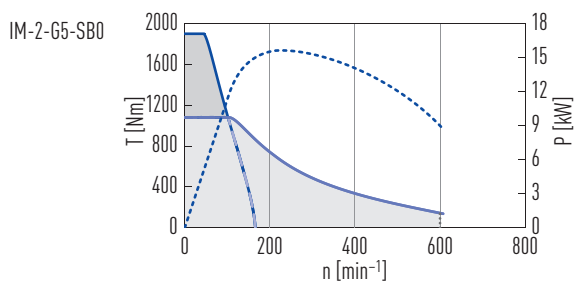


Table 5.5 Technical data for IM-2-G

	Symbol	Unit	IM-2-G5-SB0	IM-2-G5-SD0	IM-2-G7-SB0	IM-2-G7-SD0	IM-2-GA-SB0	IM-2-GA-SD0	IM-2-GF-SD0	IM-2-GF-SH0
Torques and electrical parameters										
Peak torque (for 1 sec.)	T_p	Nm	1,900		2,660		3,800		5,700	
Continuous torque (WC)	T_{c_WC}	Nm	1,080		1,510		2,160		3,240	
Stall torque (WC)	T_{s_WC}	Nm	890	892	1,245	1,247	1,781	1,784	2,676	2,676
Peak current (for 1 sec.)	I_p	A	80	160	80	160	80	160	160	320
Continuous current (WC)	I_{c_WC}	A	30.3	60.6	30.3	60.6	30.3	60.6	60.6	121.2
Stall current (WC)	I_{s_WC}	A	24.2	48.5	24.2	48.5	24.2	48.5	48.5	97.0
Resistance ¹⁾	R_{25}	Ω	2.10	0.53	2.75	0.70	3.76	0.94	1.40	0.40
Inductance ¹⁾	L_{25}	mH	21.0	5.3	27.8	7.0	38.0	9.5	13.8	3.5
Motor constant	K_m	Nm/ $\sqrt{W}$	21.13	21.03	25.85	25.62	31.58	31.58	38.82	36.31
Electrical time constant	K_e	ms	10.0	10.0	10.1	10.0	10.1	10.1	9.9	8.8
Torque constant	K_t	Nm/A	38.45	19.23	53.87	27.02	76.90	38.45	57.68	28.93
Back emf constant	K_u	$V_{eff}/(rad/s)$	22.2	11.1	31.1	15.6	44.4	22.2	33.3	16.7
Inertia of rotor	J	kgm ²	1.14		1.60		2.28		3.42	
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.31	0.31	0.24	0.23	0.17	0.17	0.12	0.10
Max. DC bus voltage	U_{max}	VDC	750							
Max. speed at T_{c_WC}	n	min ⁻¹	101	212	72	153	48	108	69	146
Max. speed at T_p	n	min ⁻¹	45	100	30	72	17	50	29	70
Rated speed	n_N	min ⁻¹	600	1,200	400	800	300	600	200	400
Mechanical parameters										
Number of poles	2p		88							
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000							
Stator height	H_S	mm	110		130		160		210	
Rotor height	H_R	mm	81		101		131		181	
Length of rotor centring fit	H	mm	20		20		20		20	
Rotor mass	M_r	kg	27.1		38.1		54.3		81.5	
Stator mass	M_s	kg	50.0		63.5		78.0		111.8	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

WC: with water cooling

¹⁾ Line to line

HIWIN torque motors IM-2

Technical drawing of a shaft assembly showing dimensions and tolerances:

- Overall length: $\varnothing 565 f_9$
- Outer diameter: $\varnothing 548$
- Inner diameter: $\varnothing \geq 459$
- Keyway diameter: $\varnothing 390,8 g_7$
- Keyway width: $\varnothing 376$
- Keyway depth: ≥ 9
- Keyway length: H
- Keyway width: H
- Keyway depth: $H_R \pm 0,2$
- Keyway width: $18 \pm 0,2$
- Keyway depth: ≥ 9
- Keyway width: $\varnothing 360 H_8$
- Keyway width: $\varnothing 420 h_9$
- Keyway depth: ≥ 9
- Keyway width: 18
- Keyway depth: ≤ 9
- Keyway width: 35
- Keyway depth: H_5

Technical drawing of a circular flange with the following dimensions and labels:

- Outer diameter: $\geq 230,5$
- Inner diameter: ≤ 51
- Flange thickness: ≤ 65
- Central hole diameter: $\emptyset 6 \text{ H8/10 [2x]}$
- Mounting holes: $M8 \times 1,25/16 [2 \times 12]$
- Angular dimensions: $18,75^\circ$, 15° , and 30°
- Reference axes: X-X

Technical drawing of a circular flange. The drawing shows a cross-section of a flange with a central hole. The outer diameter is labeled as $\geq 230,5$. The thickness of the flange is labeled as ≤ 51 . The central hole has a diameter of $\emptyset 6 H8/10 (2 \times)$. The flange has a radial hole with a diameter of $M8 \times 1,25/16 (2 \times 24)$. The flange is shown with a $18,75^\circ$ angle and a 15° angle. The flange is shown with a ≤ 65 dimension. The flange is shown with a X coordinate.

6. Options and accessories

6.1 Closed cooling jacket

For easy integration of our water-cooled torque motors, we also supply them in a closed version. The connection to the cooling unit is realised via 2 G $\frac{1}{8}$ threads in the stainless steel jacket. As in the version without a closed cooling jacket, the alignment of the motor is realised easily via the fit of the stator. Available for the series TMRW, TM-2 and IM-2G.

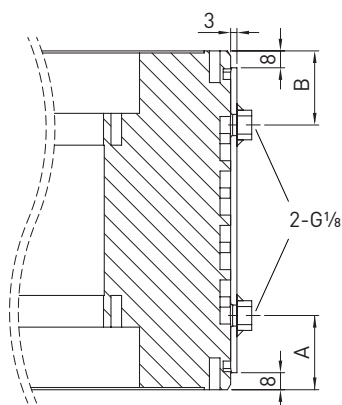


Table 6.1 Dimensions of steel cooling jacket

Torque motor ¹⁾	Dimension A [mm]	Dimension B [mm]
TMRW7, TM-2-7, IM-2-7	35	25
TMRWA, TM-2-A, IM-2-A	35	35
TMRWG, TM-2-G, IM-2-G	35	35
TMRWD, TM-2-D	27	43

¹⁾ All other sizes upon request


Torque Motors

Options and accessories

6.2 Cable outlet orientations of the torque motors

	Type S ○ Motor cables potted in the stator
	Type V ○ Motor cables potted in the stator ○ Additional strain relief plate
	Type H ○ Motor cables potted in the stator ○ Additional strain relief plate ○ PG screw connections
	Type A ○ Motor cables potted in the stator ○ Additional strain relief plate ○ 90° cable outlet


We live motion.




Linear Guideways



Ballscrews

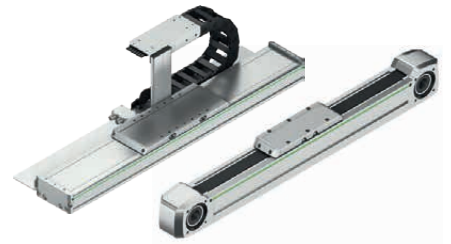

Linear Axes



Linear Axis Systems



Torque Motors



Robots



Linear Motors



Rotary Tables



Drives & Servo Motors

